

## General Description

The GreenMOS® high voltage MOSFET utilizes charge balance technology to achieve outstanding low on-resistance and lower gate charge. It is engineered to minimize conduction loss, provide superior switching performance and robust avalanche capability.

The GreenMOS® Generic series is optimized for extreme switching performance to minimize switching loss. It is tailored for high power density applications to meet the highest efficiency standards.

## Features

- Low  $R_{DS(ON)}$  & FOM
- Extremely low switching loss
- Excellent stability and uniformity



## Applications

- PC power
- LED lighting
- Telecom power
- Server power
- EV Charger
- Solar/UPS


## Key Performance Parameters

Parameter	Value	Unit
$V_{DS}$ , min @ $T_{j(max)}$	600	V
$I_D$ , pulse	60	A
$R_{DS(ON)}$ , max @ $V_{GS}=10V$	190	mΩ
$Q_g$	17.7	nC

## Marking Information

Product Name	Package	Marking
OSG55R190AF	TO251	OSG55R190A

## Package & Pin Information

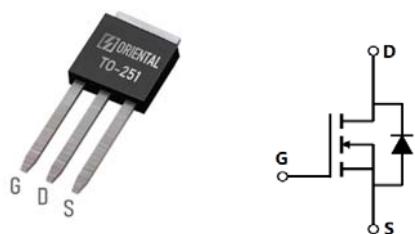

**Absolute Maximum Ratings** at  $T_j=25^\circ\text{C}$  unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	550	V
Gate-source voltage	$V_{GS}$	$\pm 30$	V
Continuous drain current <sup>1)</sup> , $T_c=25^\circ\text{C}$	$I_D$	20	A
Continuous drain current <sup>1)</sup> , $T_c=100^\circ\text{C}$		12.5	
Pulsed drain current <sup>2)</sup> , $T_c=25^\circ\text{C}$	$I_{D, \text{pulse}}$	60	A
Continuous diode forward current <sup>1)</sup> , $T_c=25^\circ\text{C}$	$I_S$	20	A
Diode pulsed current <sup>2)</sup> , $T_c=25^\circ\text{C}$	$I_{S, \text{pulse}}$	60	A
Power dissipation <sup>3)</sup> , $T_c=25^\circ\text{C}$	$P_D$	104	W
Single pulsed avalanche energy <sup>5)</sup>	$E_{AS}$	200	mJ
MOSFET dv/dt ruggedness, $V_{DS}=0\dots 480\text{ V}$	dv/dt	50	V/ns
Reverse diode dv/dt, $V_{DS}=0\dots 480\text{ V}$ , $I_{SD} \leq I_D$	dv/dt	15	V/ns
Operation and storage temperature	$T_{\text{stg}}, T_j$	-55 to 150	°C

**Thermal Characteristics**

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case	$R_{\theta JC}$	1.20	°C/W
Thermal resistance, junction-ambient <sup>4)</sup>	$R_{\theta JA}$	62	°C/W

**Electrical Characteristics** at  $T_j=25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	$BV_{DSS}$	550			V	$V_{GS}=0\text{ V}$ , $I_D=250\text{ uA}$
		600				$V_{GS}=0\text{ V}$ , $I_D=250\text{ uA}$ , $T_j=150^\circ\text{C}$
Gate threshold voltage	$V_{GS(\text{th})}$	2.7		3.7	V	$V_{DS}=V_{GS}$ , $I_D=250\text{ uA}$
Drain-source on-state resistance	$R_{DS(\text{ON})}$		0.15	0.19	$\Omega$	$V_{GS}=10\text{ V}$ , $I_D=10\text{ A}$
			0.37			$V_{GS}=10\text{ V}$ , $I_D=10\text{ A}$ , $T_j=150^\circ\text{C}$
Gate-source leakage current	$I_{GSS}$			100	nA	$V_{GS}=30\text{ V}$
				-100		$V_{GS}=-30\text{ V}$
Drain-source leakage current	$I_{DSS}$			1	$\mu\text{A}$	$V_{DS}=550\text{ V}$ , $V_{GS}=0\text{ V}$

### Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C <sub>iss</sub>		991.4		pF	V <sub>GS</sub> =0 V, V <sub>DS</sub> =50 V, f=100 kHz
Output capacitance	C <sub>oss</sub>		125.9		pF	
Reverse transfer capacitance	C <sub>rss</sub>		2.7		pF	
Turn-on delay time	t <sub>d(on)</sub>		22		ns	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, R <sub>G</sub> =2 Ω, I <sub>D</sub> =10 A
Rise time	t <sub>r</sub>		6.7		ns	
Turn-off delay time	t <sub>d(off)</sub>		36.1		ns	
Fall time	t <sub>f</sub>		3.5		ns	

### Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q <sub>g</sub>		17.7		nC	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, I <sub>D</sub> =10 A
Gate-source charge	Q <sub>gs</sub>		4		nC	
Gate-drain charge	Q <sub>gd</sub>		7.2		nC	
Gate plateau voltage	V <sub>plateau</sub>		5.7		V	


### Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Diode forward voltage	V <sub>SD</sub>			1.3	V	I <sub>S</sub> =20 A, V <sub>GS</sub> =0 V
Reverse recovery time	t <sub>rr</sub>		237.7		ns	V <sub>R</sub> =400 V, I <sub>S</sub> =10 A, di/dt=100 A/μs
Reverse recovery charge	Q <sub>rr</sub>		2.6		μC	
Peak reverse recovery current	I <sub>rrm</sub>		21.1		A	


### Note

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3) Pd is based on max. junction temperature, using junction-case thermal resistance.
- 4) The value of R<sub>θJA</sub> is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T<sub>a</sub>=25 °C.
- 5) V<sub>DD</sub>=100 V, V<sub>GS</sub>=10 V, L=10 mH, starting T<sub>j</sub>=25 °C.


### Electrical Characteristics Diagrams

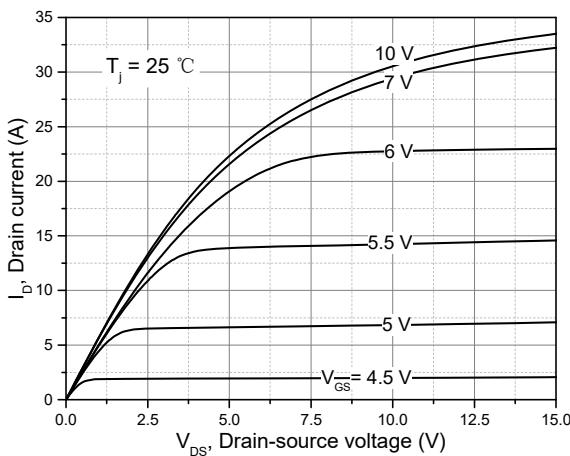


**Figure 1. Typ. output characteristics**

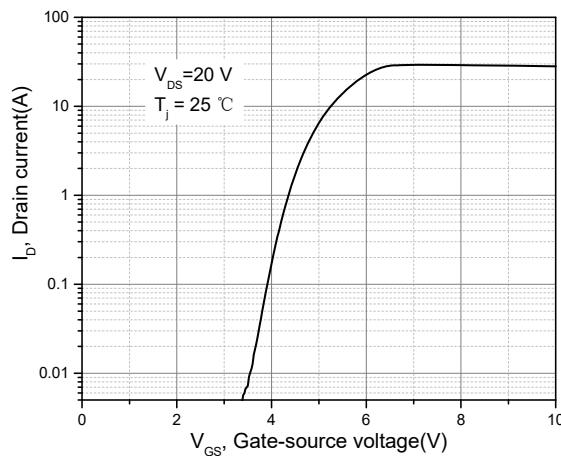


**Figure 2. Typ. transfer characteristics**

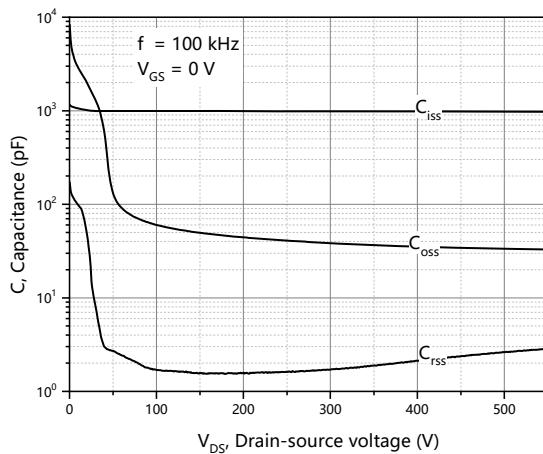


**Figure 3. Typ. capacitances**

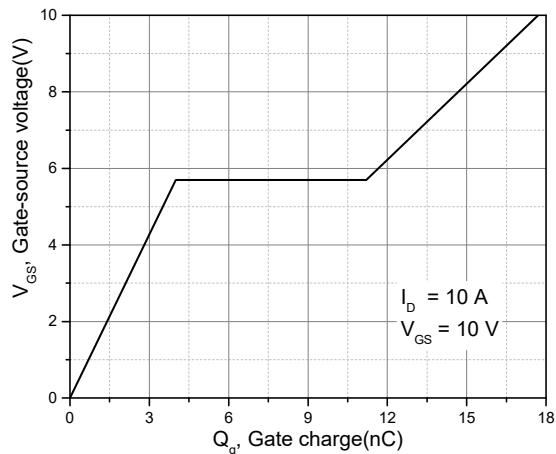


**Figure 4. Typ. gate charge**




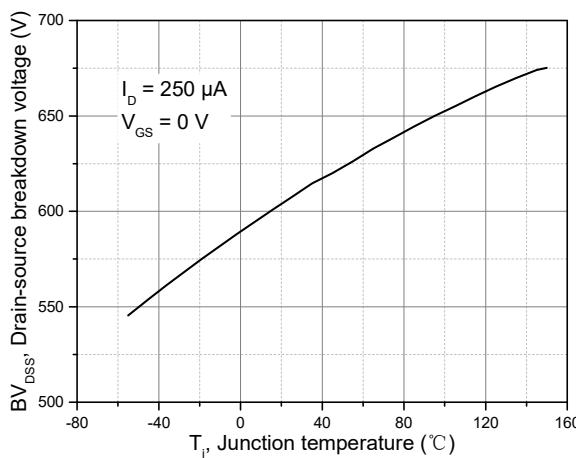


**Figure 5. Drain-source breakdown voltage**

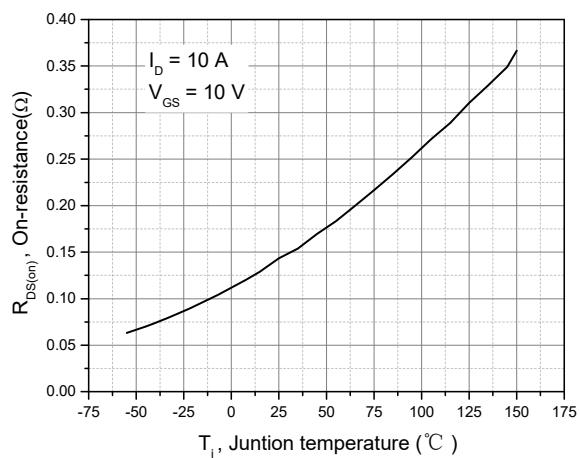


**Figure 6. Drain-source on-state resistance**

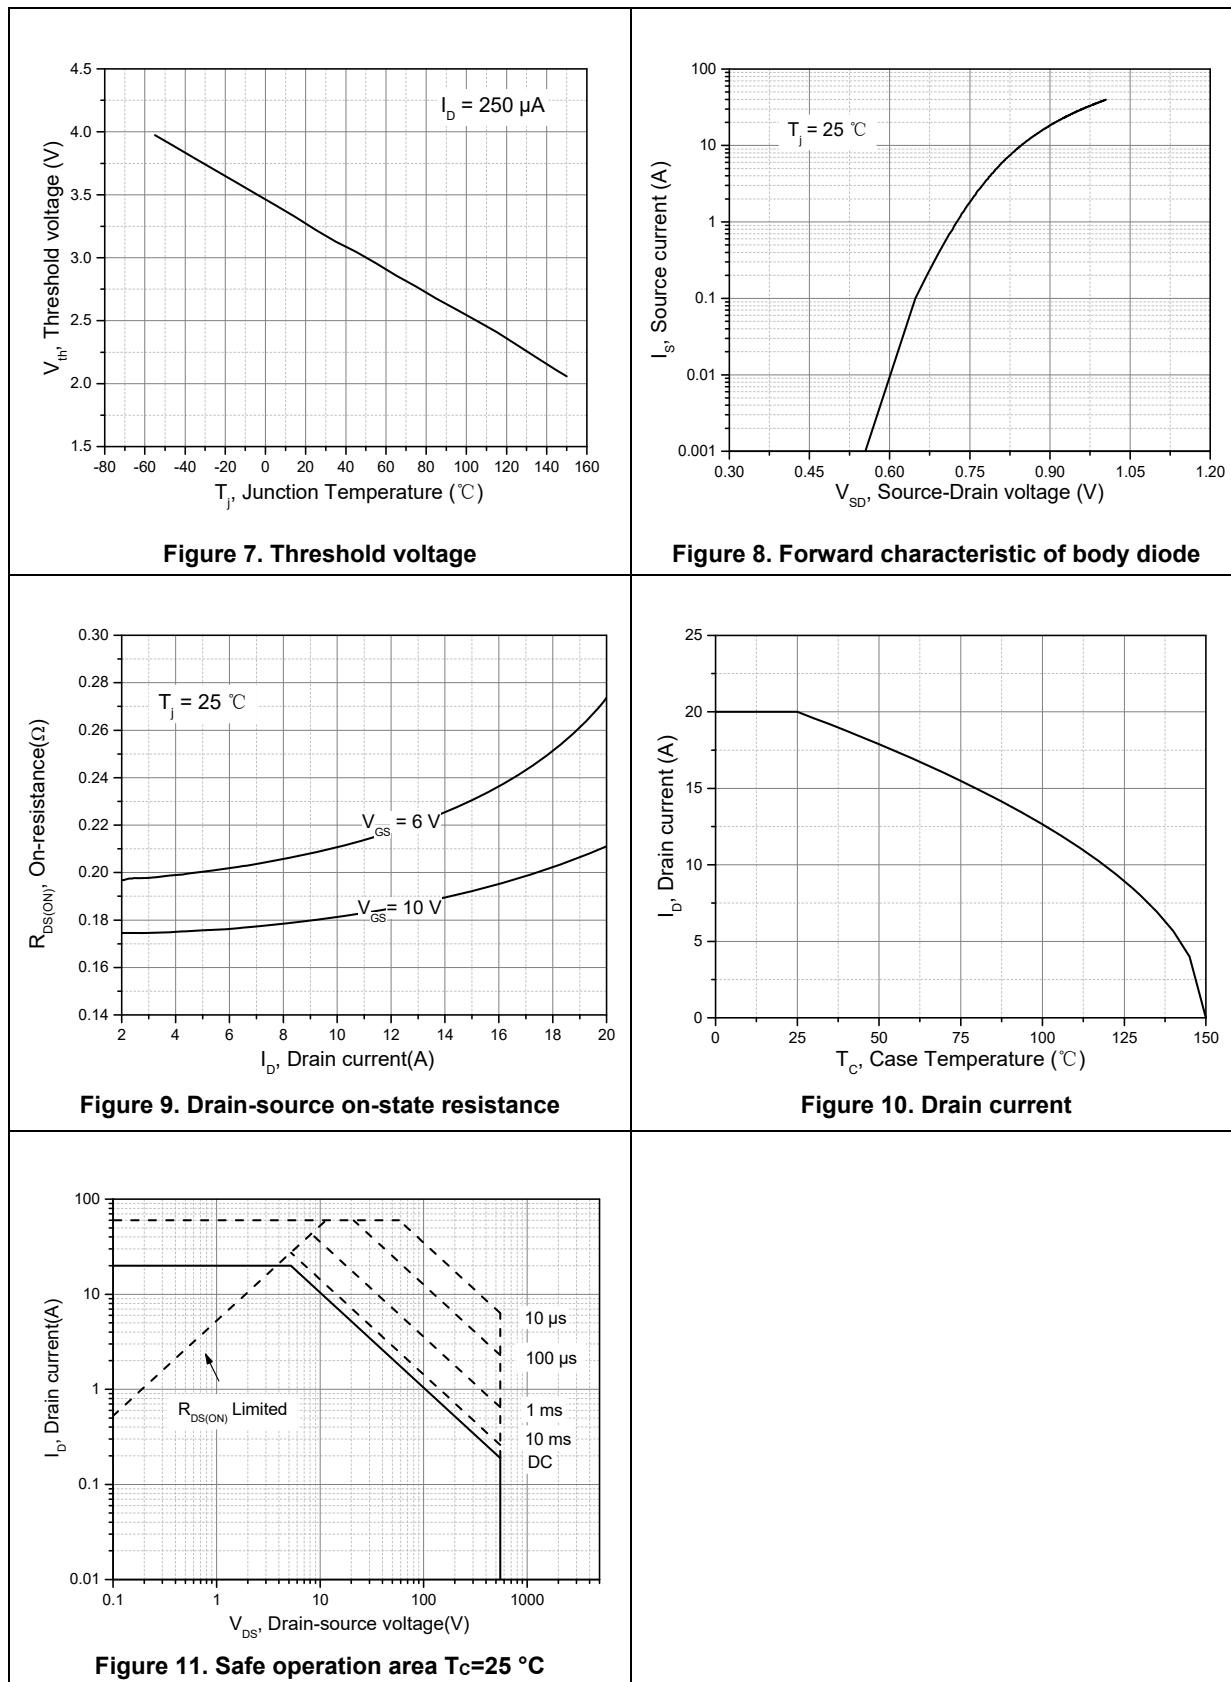

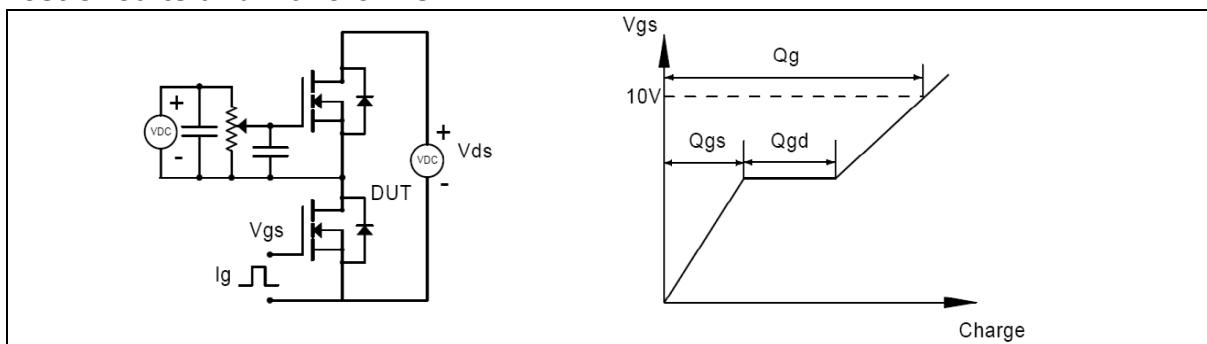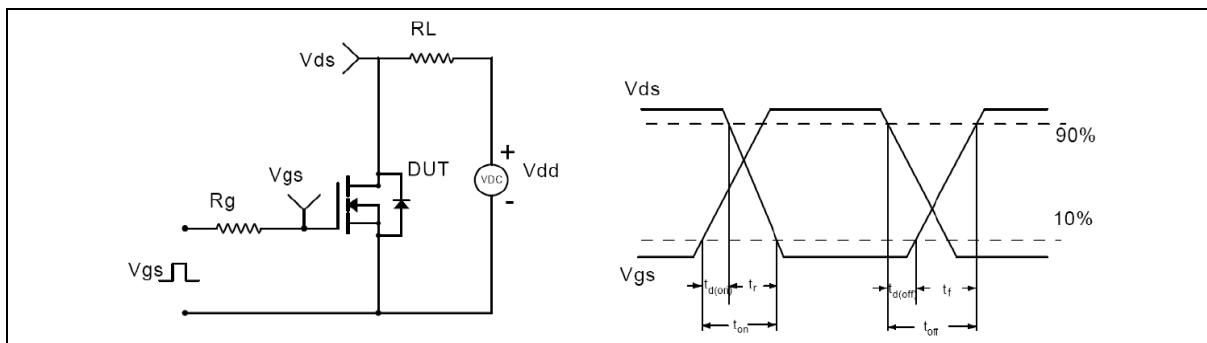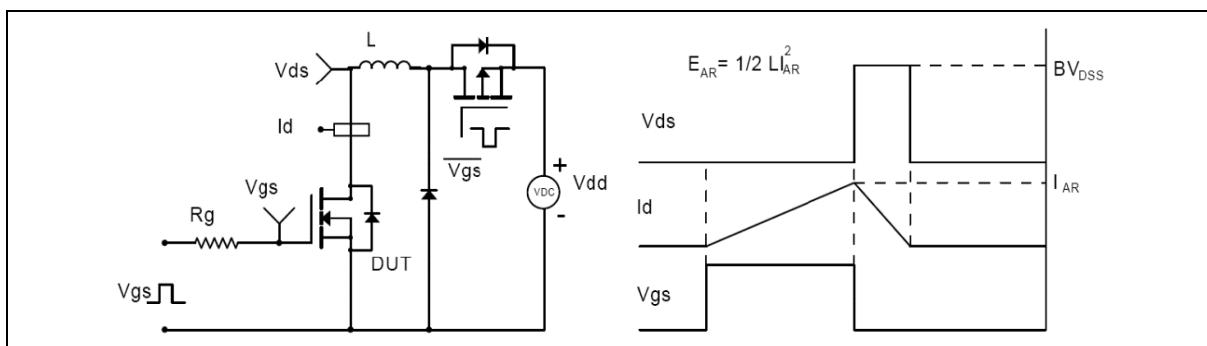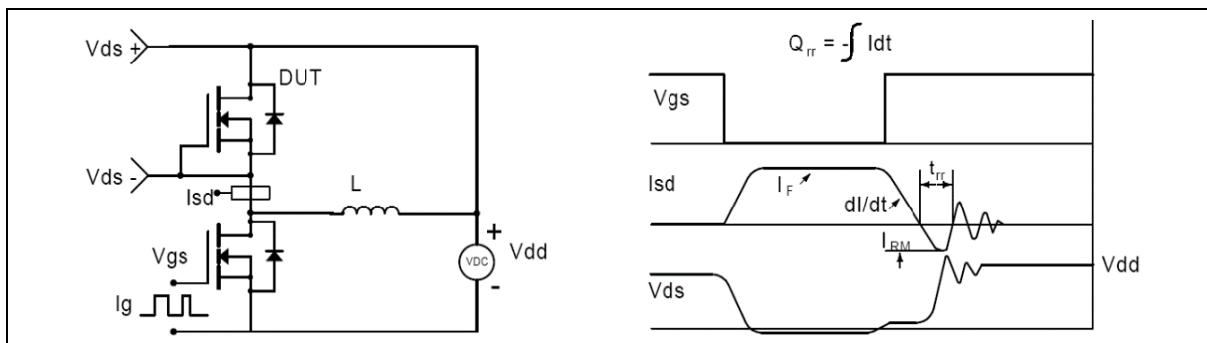**Test circuits and waveforms**

**Figure 1. Gate charge test circuit & waveform**

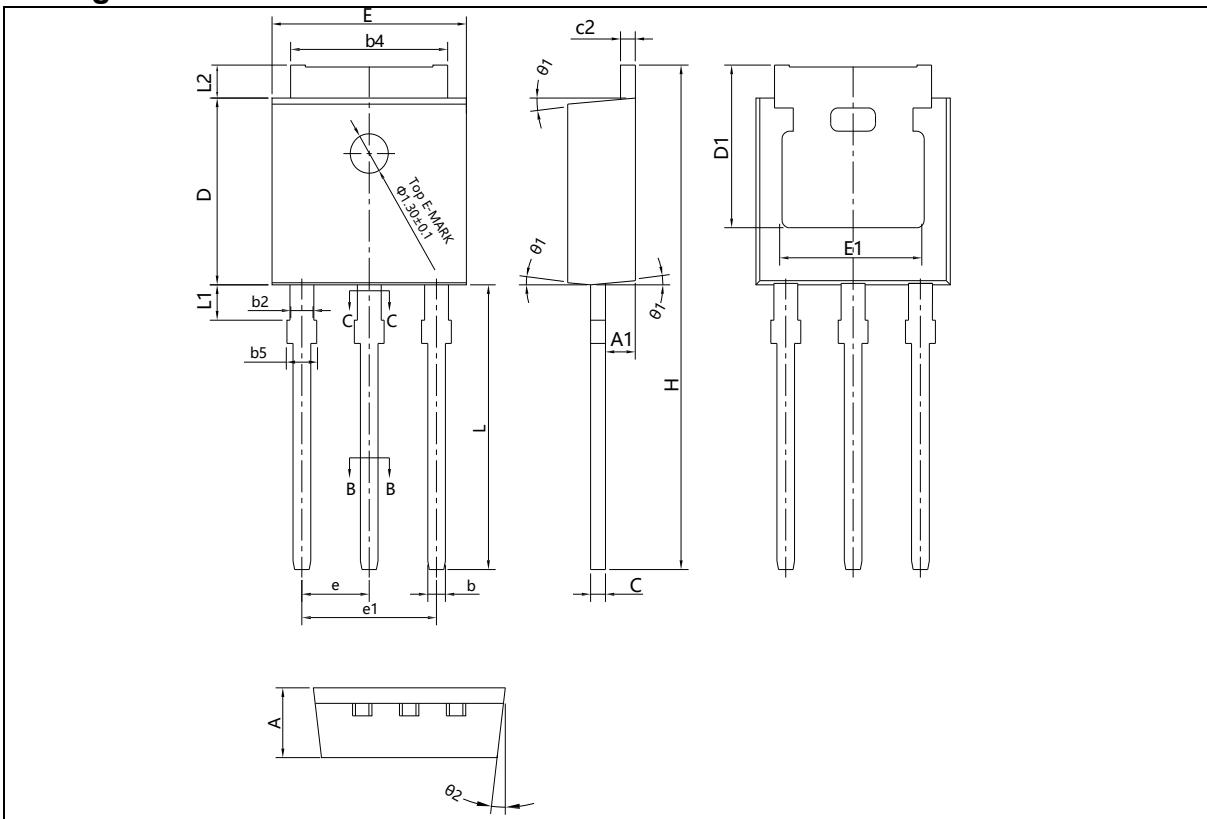**Figure 2. Switching time test circuit & waveforms**

**Figure 3. Unclamped inductive switching (UIS) test circuit & waveforms**

**Figure 4. Diode reverse recovery test circuit & waveforms**

### Package Information



Symbol	mm		
	Min	Nom	Max
A	2.20	2.30	2.35
A1	0.90	1.01	1.10
b	0.56	-	0.69
b1	0.55	0.60	0.65
b2	0.77	-	0.90
b3	0.76	0.81	0.86
b4	5.23	5.33	5.43
b5	-	-	1.05
c	0.46	-	0.59
c1	0.45	0.51	0.55
c2	0.46	-	0.59
D	6.00	6.10	6.20
D1	5.20	-	-
E	6.50	6.60	6.70
E1	4.60	4.83	5.00
e	2.24	2.29	2.34
e1	4.47	4.57	4.67
H	16.18	16.48	16.78
L	9.00	9.30	9.60
L1	0.95	1.16	1.35
L2	0.90	1.08	1.25
$\theta_1$	3°	5°	7°
$\theta_2$	1°	3°	5°

Version 1: TO251-J package outline dimension

Package Type	Units/Reel	Reels / Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO251-J	75	60	4500	5	22500

### Product Information

Product	Package	Pb Free	RoHS	Halogen Free
OSG55R190AF	TO251	yes	yes	yes

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved /

