

## General Description

The GreenMOS® high voltage MOSFET utilizes charge balance technology to achieve outstanding low on-resistance and lower gate charge. It is engineered to minimize conduction loss, provide superior switching performance and robust avalanche capability.

The GreenMOS® Generic series is optimized for extreme switching performance to minimize switching loss. It is tailored for high power density applications to meet the highest efficiency standards.

## Features

- Low  $R_{DS(ON)}$  & FOM
- Extremely low switching loss
- Excellent stability and uniformity



## Applications

- PC power
- LED lighting
- Telecom power
- Server power
- EV Charger
- Solar/UPS


## Key Performance Parameters

Parameter	Value	Unit
$V_{DS}$ , min @ $T_{j(max)}$	650	V
$I_D$ , pulse	240	A
$R_{DS(ON)}$ , max @ $V_{GS}=10V$	28	mΩ
$Q_g$	181.8	nC

## Marking Information

Product Name	Package	Marking
OSG60R028HTF	TO247	OSG60R028HT

## Package & Pin Information

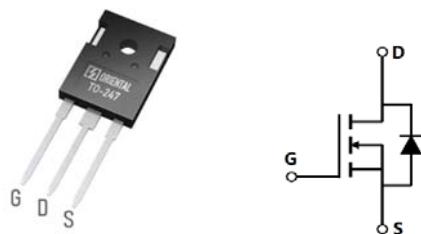

**Absolute Maximum Ratings** at  $T_j=25^\circ\text{C}$  unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	600	V
Gate-source voltage	$V_{GS}$	$\pm 30$	V
Continuous drain current <sup>1)</sup> , $T_c=25^\circ\text{C}$	$I_D$	80	A
Continuous drain current <sup>1)</sup> , $T_c=100^\circ\text{C}$		50	
Pulsed drain current <sup>2)</sup> , $T_c=25^\circ\text{C}$	$I_{D, \text{pulse}}$	240	A
Continuous diode forward current <sup>1)</sup> , $T_c=25^\circ\text{C}$	$I_S$	80	A
Diode pulsed current <sup>2)</sup> , $T_c=25^\circ\text{C}$	$I_{S, \text{pulse}}$	240	A
Power dissipation <sup>3)</sup> , $T_c=25^\circ\text{C}$	$P_D$	455	W
Single pulsed avalanche energy <sup>5)</sup>	$E_{AS}$	1850	mJ
MOSFET dv/dt ruggedness, $V_{DS}=0\dots 480\text{ V}$	dv/dt	50	V/ns
Reverse diode dv/dt, $V_{DS}=0\dots 480\text{ V}$ , $I_{SD} \leq I_D$	dv/dt	15	V/ns
Operation and storage temperature	$T_{stg}, T_j$	-55 to 150	°C

**Thermal Characteristics**

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case	$R_{\theta JC}$	0.27	°C/W
Thermal resistance, junction-ambient <sup>4)</sup>	$R_{\theta JA}$	62	°C/W

**Electrical Characteristics** at  $T_j=25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	$BV_{DSS}$	600			V	$V_{GS}=0\text{ V}$ , $I_D=1\text{ mA}$
		650				$V_{GS}=0\text{ V}$ , $I_D=1\text{ mA}$ , $T_j=150^\circ\text{C}$
Gate threshold voltage	$V_{GS(\text{th})}$	2.9		3.9	V	$V_{DS}=V_{GS}$ , $I_D=2\text{ mA}$
Drain-source on-state resistance	$R_{DS(\text{ON})}$		0.024	0.028	$\Omega$	$V_{GS}=10\text{ V}$ , $I_D=40\text{ A}$
			0.06			$V_{GS}=10\text{ V}$ , $I_D=40\text{ A}$ , $T_j=150^\circ\text{C}$
Gate-source leakage current	$I_{GSS}$			100	nA	$V_{GS}=30\text{ V}$
				-100		$V_{GS}=-30\text{ V}$
Drain-source leakage current	$I_{DSS}$			1	$\mu\text{A}$	$V_{DS}=600\text{ V}$ , $V_{GS}=0\text{ V}$
Gate resistance	$R_G$		2.2		$\Omega$	$f=1\text{ MHz}$ , Open drain

### Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C <sub>iss</sub>		7373		pF	V <sub>GS</sub> =0 V, V <sub>DS</sub> =50 V, f=100 KHz
Output capacitance	C <sub>oss</sub>		504		pF	
Reverse transfer capacitance	C <sub>rss</sub>		17		pF	
Turn-on delay time	t <sub>d(on)</sub>		42.5		ns	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, R <sub>G</sub> =2 Ω, I <sub>D</sub> =40 A
Rise time	t <sub>r</sub>		71		ns	
Turn-off delay time	t <sub>d(off)</sub>		126.6		ns	
Fall time	t <sub>f</sub>		3.7		ns	

### Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q <sub>g</sub>		181.8		nC	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, I <sub>D</sub> =40 A
Gate-source charge	Q <sub>gs</sub>		36.5		nC	
Gate-drain charge	Q <sub>gd</sub>		49.5		nC	
Gate plateau voltage	V <sub>plateau</sub>		5.5		V	

### Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Diode forward voltage	V <sub>SD</sub>			1.3	V	I <sub>S</sub> =80 A, V <sub>GS</sub> =0 V
Reverse recovery time	t <sub>rr</sub>		584		ns	V <sub>R</sub> =400 V, I <sub>S</sub> =40 A, di/dt=100 A/μs
Reverse recovery charge	Q <sub>rr</sub>		12.8		μC	
Peak reverse recovery current	I <sub>rrm</sub>		39.8		A	

### Note

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3) Pd is based on max. junction temperature, using junction-case thermal resistance.
- 4) The value of R<sub>θJA</sub> is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T<sub>a</sub>=25 °C.
- 5) V<sub>DD</sub>=100 V, V<sub>GS</sub>=10 V, L=79.9 mH, starting T<sub>j</sub>=25 °C.

### Electrical Characteristics Diagrams

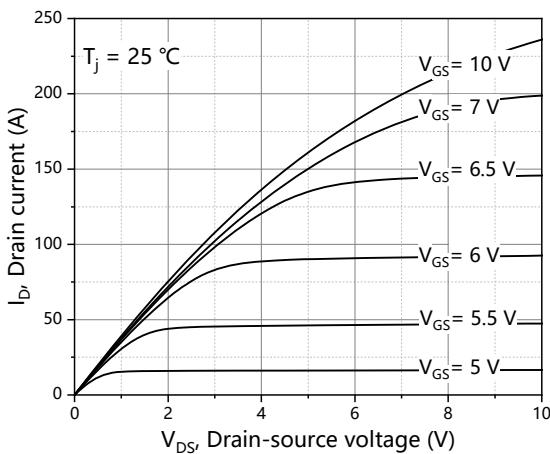


Figure 1. Typ. output characteristics

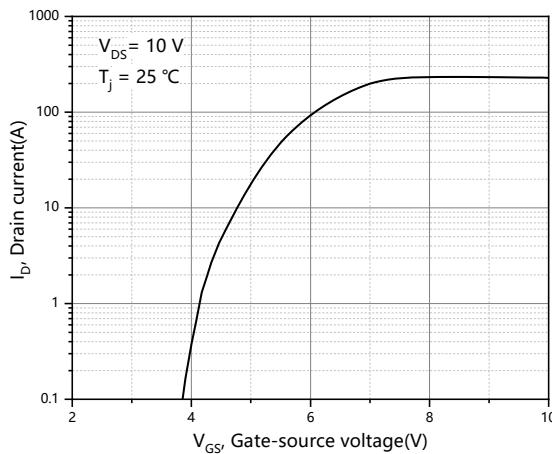


Figure 2. Typ. transfer characteristics

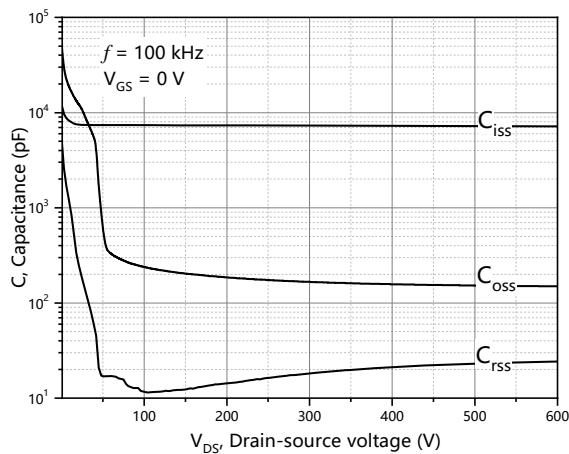


Figure 3. Typ. capacitances

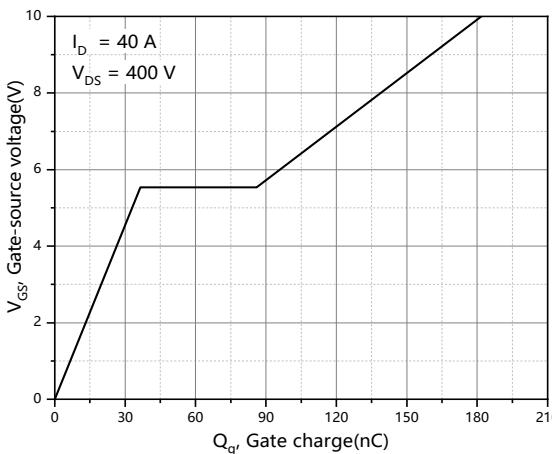


Figure 4. Typ. gate charge

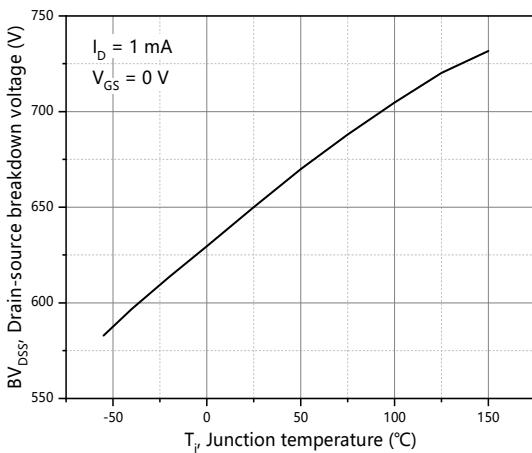


Figure 5. Drain-source breakdown voltage

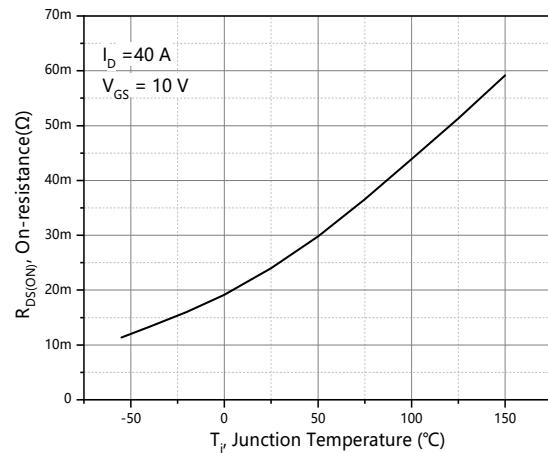
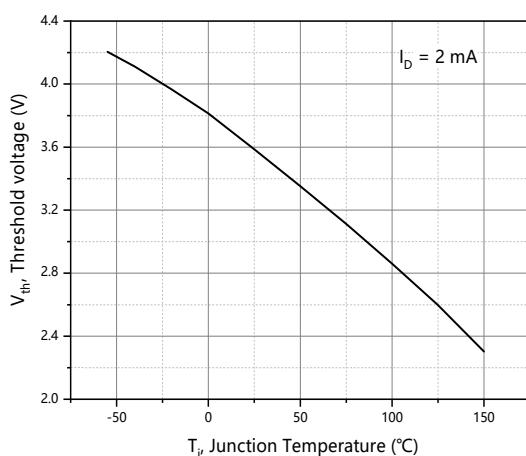
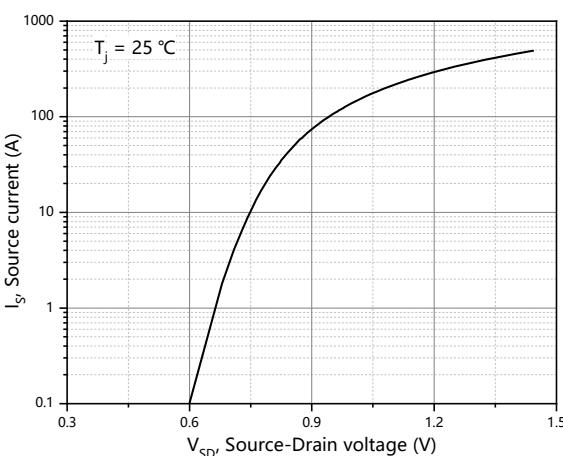
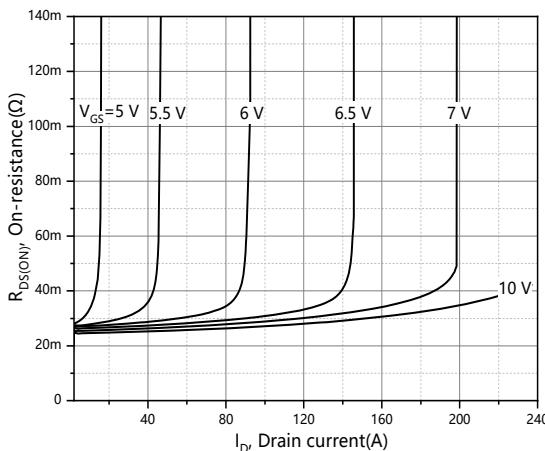
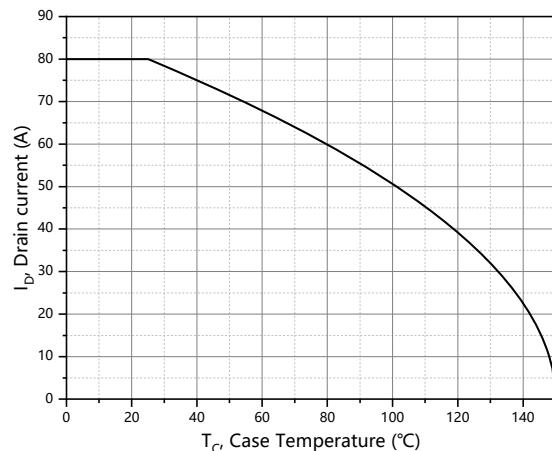
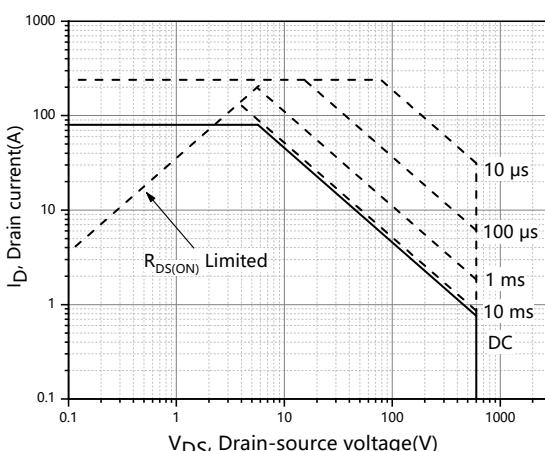
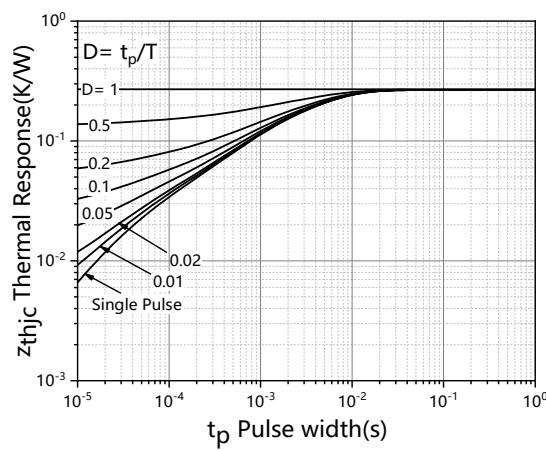
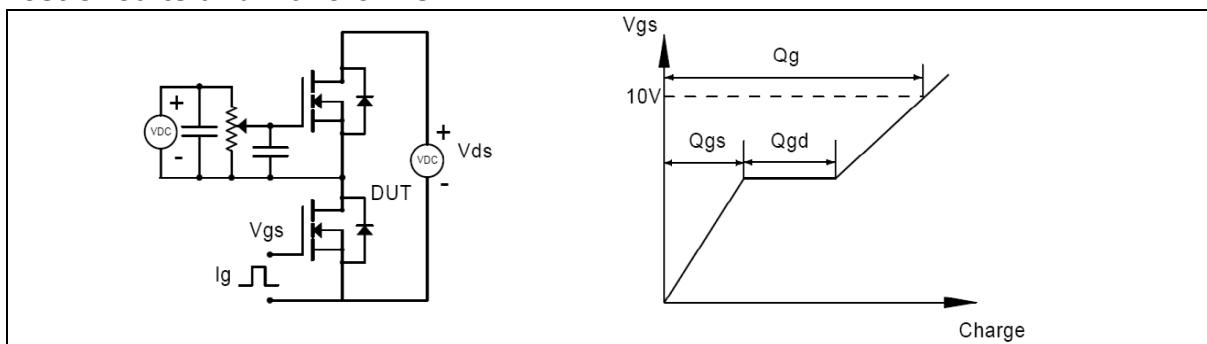
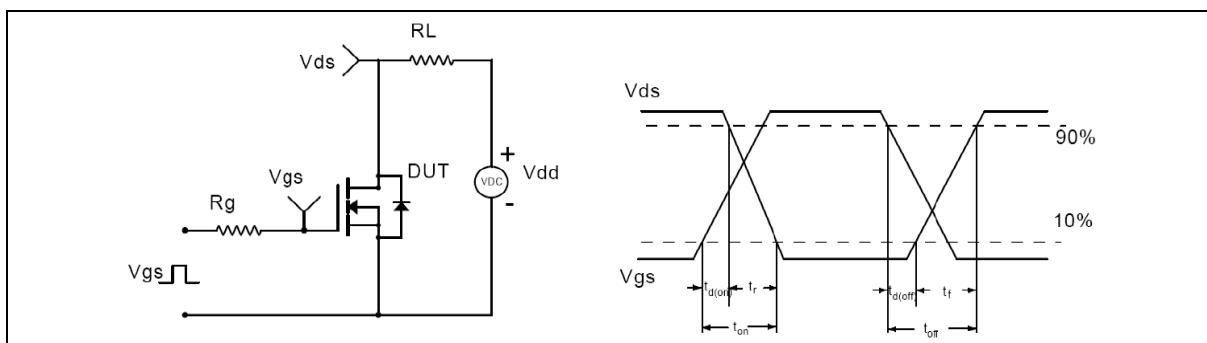
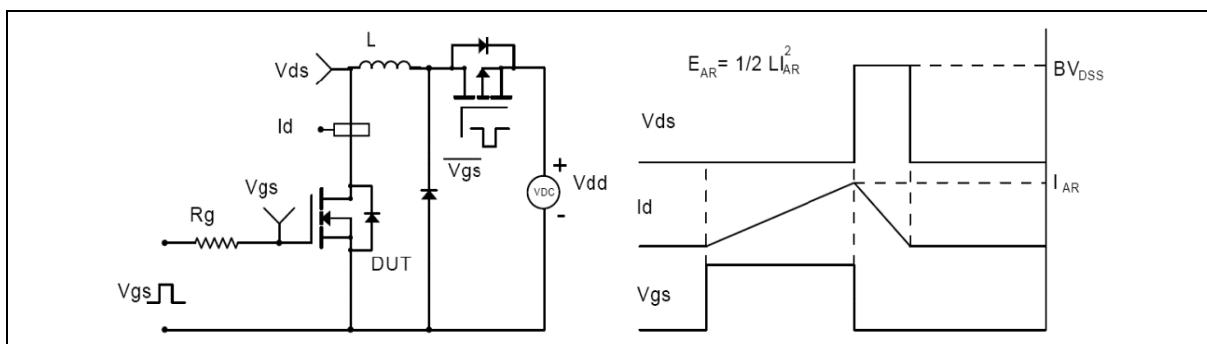
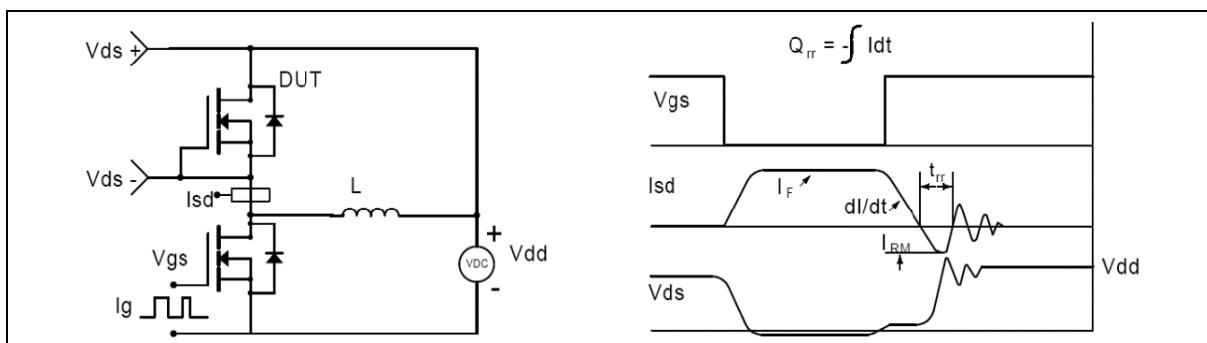
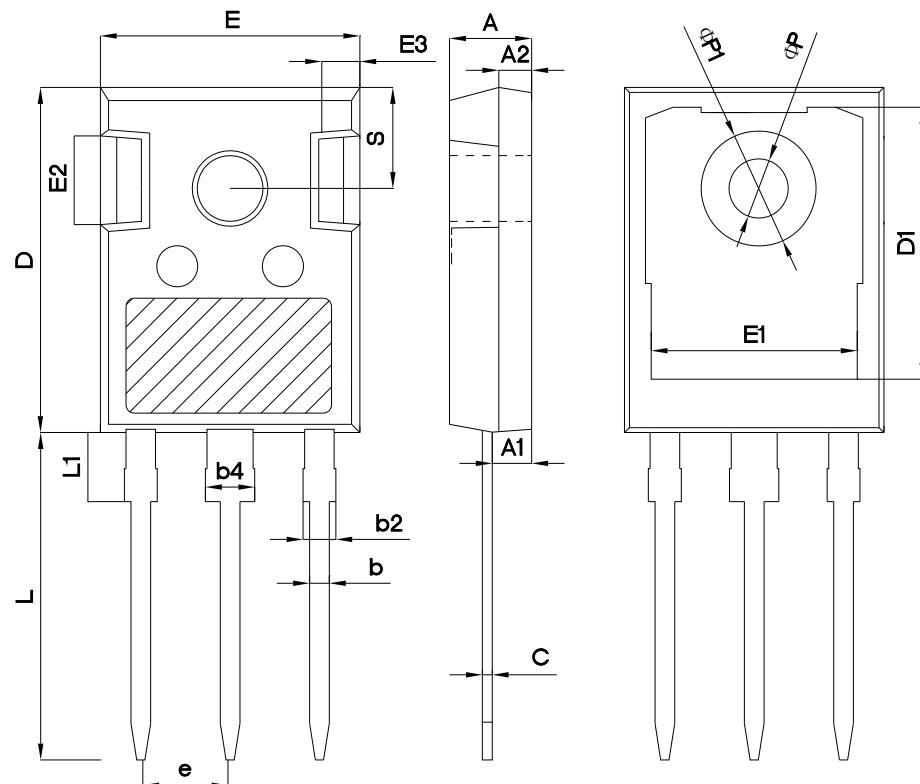


Figure 6. Drain-source on-state resistance


**Figure 7. Threshold voltage**

**Figure 8. Forward characteristic of body diode**

**Figure 9. Drain-source on-state resistance**

**Figure 10. Drain current**

**Figure 11. Safe operation area  $T_c=25\text{ }^\circ\text{C}$** 

**Figure 12, Max. transient thermal impedance**

**Test circuits and waveforms**

**Figure 1. Gate charge test circuit & waveform**

**Figure 2. Switching time test circuit & waveforms**

**Figure 3. Unclamped inductive switching (UIS) test circuit & waveforms**

**Figure 4. Diode reverse recovery test circuit & waveforms**


### Package Information



Symbol	mm		
	Min	Nom	Max
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.80	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44 BSC		
L	19.82	19.92	20.22
L1	-	-	4.30
ΦP	3.40	3.60	3.80
ΦP1	-	-	7.30
S	6.15 BSC		

Version 1:, TO247-C package outline dimension

### Package Information

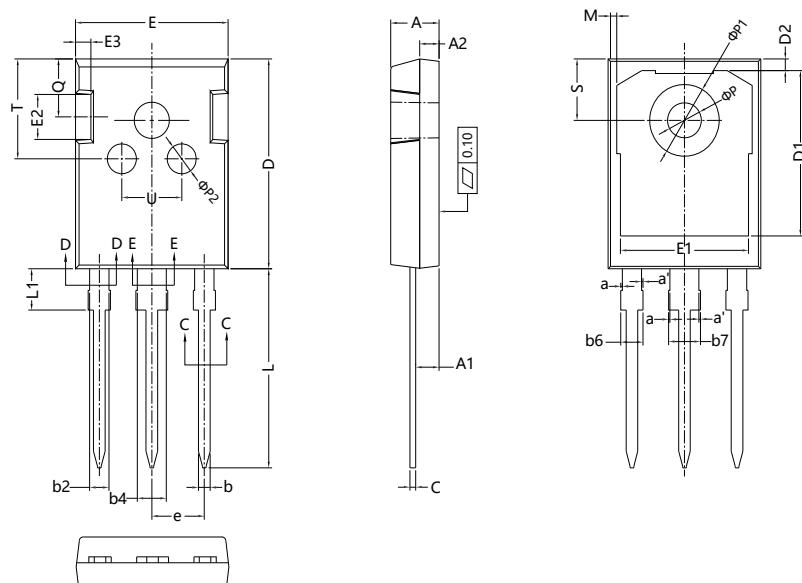

Symbol	mm		
	Min	Nom	Max
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
a	0.00	-	0.15
a'	0.00	-	0.15
b	1.16	-	1.26
b1	1.15	1.2	1.22
b2	1.96	-	2.06
b3	1.95	2.00	2.02
b4	2.96	-	3.06
b5	2.96	3.00	3.02
b6	-	-	2.25
b7	-	-	3.25
c	0.59	-	0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.17	1.35
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	4.40	4.50	4.60
E3	2.40	2.50	2.60
e	5.436 BSC		
L	19.80	19.92	20.10
L1	-	-	4.30
M	0.35	-	0.95
P	3.40	3.50	3.60
P1	7.00	-	7.40
P2	2.40	2.5	2.6
Q	5.60	-	6.0
S	6.05	6.15	6.25
T	9.8	-	10.20
U	6.00	-	6.40

Version 2: TO247-J package outline dimension

## Ordering Information

Package Type	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Carton Box	Units/Carton Box
TO247-C	30	11	330	6	1980
TO247-J	30	20	600	5	3000

## Product Information

Product	Package	Pb Free	RoHS	Halogen Free
OSG60R028HTF	TO247	yes	yes	yes

## Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved