

## General Description

The GreenMOS® high voltage MOSFET utilizes charge balance technology to achieve outstanding low on-resistance and lower gate charge. It is engineered to minimize conduction loss, provide superior switching performance and robust avalanche capability.

The GreenMOS® SuperSi series is based on Oriental Semiconductor's unique device design to achieve extremely fast switching characteristics. It is the perfect replacement for the Gallium Nitride (GaN) device in high frequency operations with better ruggedness and cost. It is targeted to meet the most aggressive efficiency standards of power supply systems by pushing both performance and power density to extreme limits.

## Features

- Low  $R_{DS(ON)}$  & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- Easy to design in



## Applications

- PD charger
- Large screen display
- Telecom power
- Server power


## Key Performance Parameters

Parameter	Value	Unit
$V_{DS, min} @ T_{j(max)}$	700	V
$I_D, pulse$	36	A
$R_{DS(ON), max} @ V_{GS}=10V$	340	mΩ
$Q_g$	9.6	nC

## Marking Information

Product Name	Package	Marking
OSS65R340DF	TO252	OSS65R340D

## Package & Pin Information

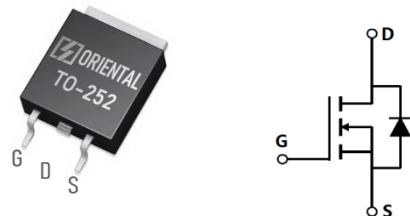

**Absolute Maximum Ratings** at  $T_j=25^\circ\text{C}$  unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	650	V
Gate-source voltage	$V_{GS}$	$\pm 30$	V
Continuous drain current <sup>1)</sup> , $T_C=25^\circ\text{C}$	$I_D$	12	A
Continuous drain current <sup>1)</sup> , $T_C=100^\circ\text{C}$		7.6	
Pulsed drain current <sup>2)</sup> , $T_C=25^\circ\text{C}$	$I_{D,\text{pulse}}$	36	A
Continuous diode forward current <sup>1)</sup> , $T_C=25^\circ\text{C}$	$I_S$	12	A
Diode pulsed current <sup>2)</sup> , $T_C=25^\circ\text{C}$	$I_{S,\text{pulse}}$	36	A
Power dissipation <sup>3)</sup> , $T_C=25^\circ\text{C}$	$P_D$	83	W
Single pulsed avalanche energy <sup>5)</sup>	$E_{AS}$	200	mJ
MOSFET dv/dt ruggedness, $V_{DS}=0\ldots 480\text{ V}$	dv/dt	50	V/ns
Reverse diode dv/dt, $V_{DS}=0\ldots 480\text{ V}$ , $I_{SD} \leq I_D$	dv/dt	15	V/ns
Operation and storage temperature	$T_{stg}, T_j$	-55 to 150	°C

**Thermal Characteristics**

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case	$R_{\theta JC}$	1.5	°C/W
Thermal resistance, junction-ambient <sup>4)</sup>	$R_{\theta JA}$	62	°C/W

**Electrical Characteristics** at  $T_j=25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	$BV_{DSS}$	650			V	$V_{GS}=0\text{ V}$ , $I_D=250\text{ }\mu\text{A}$
		700				$V_{GS}=0\text{ V}$ , $I_D=250\text{ }\mu\text{A}$ , $T_j=150^\circ\text{C}$
Gate threshold voltage	$V_{GS(\text{th})}$	2.9		3.9	V	$V_{DS}=V_{GS}$ , $I_D=250\text{ }\mu\text{A}$
Drain-source on-state resistance	$R_{DS(\text{ON})}$		0.30	0.34	$\Omega$	$V_{GS}=10\text{ V}$ , $I_D=6\text{ A}$
			0.73			$V_{GS}=10\text{ V}$ , $I_D=6\text{ A}$ , $T_j=150^\circ\text{C}$
Gate-source leakage current	$I_{GSS}$			100	nA	$V_{GS}=30\text{ V}$
				-100		$V_{GS}=-30\text{ V}$
Drain-source leakage current	$I_{DSS}$			1	$\mu\text{A}$	$V_{DS}=650\text{ V}$ , $V_{GS}=0\text{ V}$

### Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C <sub>iss</sub>		443.5		pF	V <sub>GS</sub> =0 V, V <sub>DS</sub> =50 V, f=100 KHz
Output capacitance	C <sub>oss</sub>		59.6		pF	
Reverse transfer capacitance	C <sub>rss</sub>		1.7		pF	
Turn-on delay time	t <sub>d(on)</sub>		22.4		ns	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, R <sub>G</sub> =2 Ω, I <sub>D</sub> =6 A
Rise time	t <sub>r</sub>		17.5		ns	
Turn-off delay time	t <sub>d(off)</sub>		40.3		ns	
Fall time	t <sub>f</sub>		7.2		ns	

### Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q <sub>g</sub>		9.6		nC	V <sub>GS</sub> =10 V, V <sub>DS</sub> =400 V, I <sub>D</sub> =6 A
Gate-source charge	Q <sub>gs</sub>		2.2		nC	
Gate-drain charge	Q <sub>gd</sub>		4.5		nC	
Gate plateau voltage	V <sub>plateau</sub>		6.5		V	

### Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Diode forward voltage	V <sub>SD</sub>			1.3	V	I <sub>S</sub> =12 A, V <sub>GS</sub> =0 V
Reverse recovery time	t <sub>rr</sub>		236.5		ns	
Reverse recovery charge	Q <sub>rr</sub>		2.2		μC	
Peak reverse recovery current	I <sub>rrm</sub>		19.1		A	

### Note

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3) Pd is based on max. junction temperature, using junction-case thermal resistance.
- 4) The value of R<sub>θJA</sub> is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T<sub>a</sub>=25 °C.
- 5) V<sub>DD</sub>=100 V, V<sub>GS</sub>=10 V, L=60 mH, starting T<sub>j</sub>=25 °C.

## Electrical Characteristics Diagrams

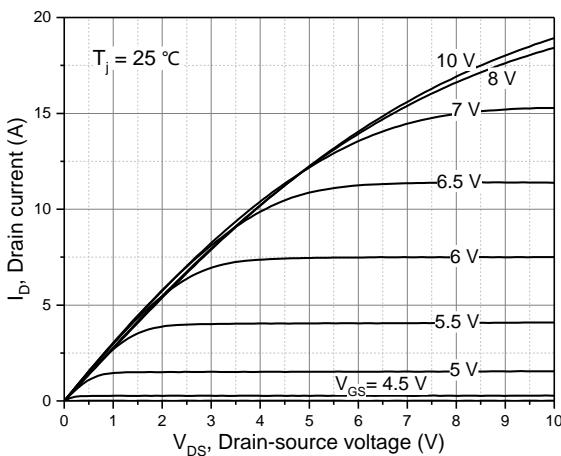


Figure 1. Typ. output characteristics

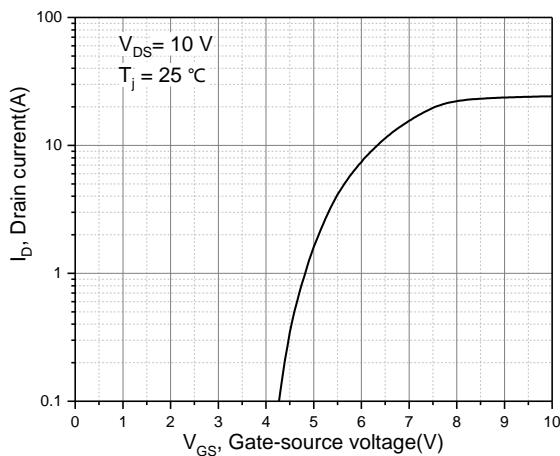


Figure 2. Typ. transfer characteristics

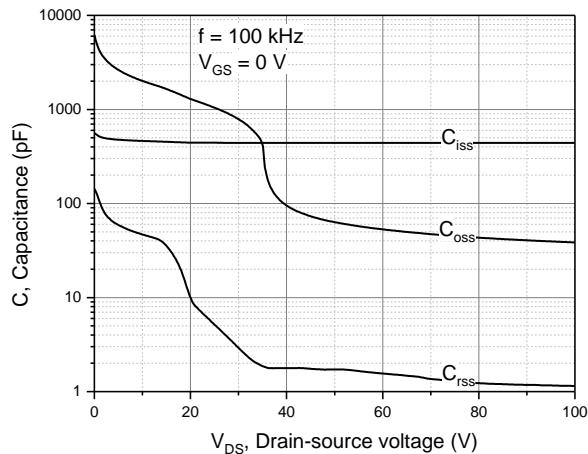


Figure 3. Typ. capacitances

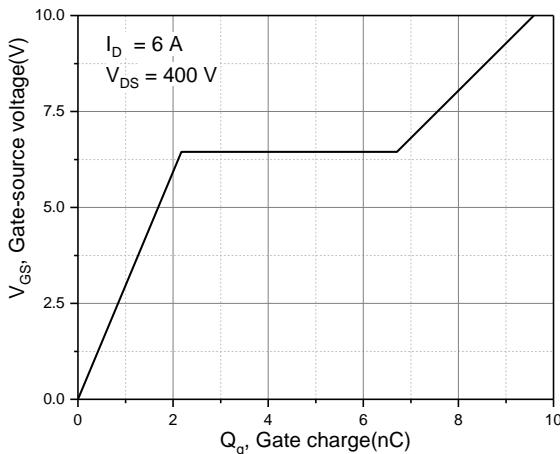


Figure 4. Typ. gate charge

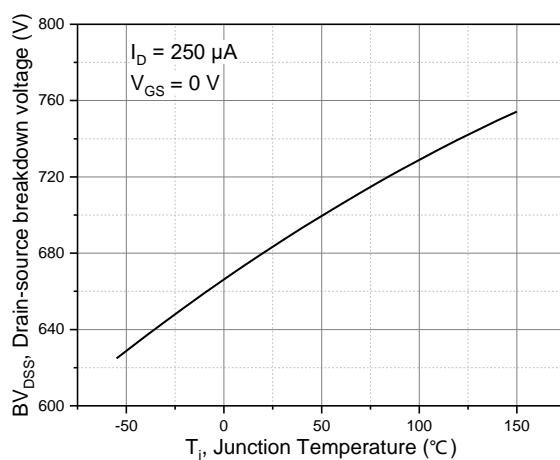


Figure 5. Drain-source breakdown voltage


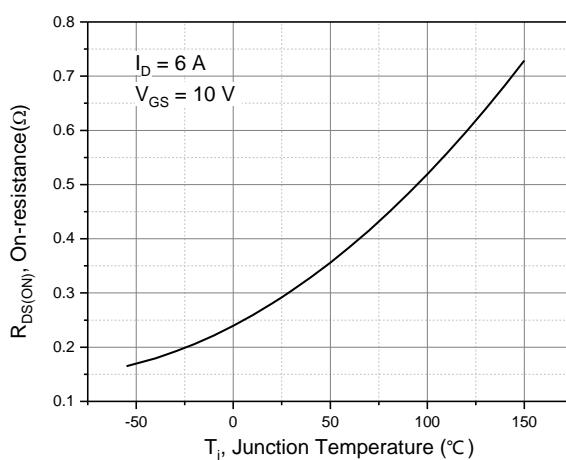



Figure 6. Drain-source on-state resistance




### Test circuits and waveforms

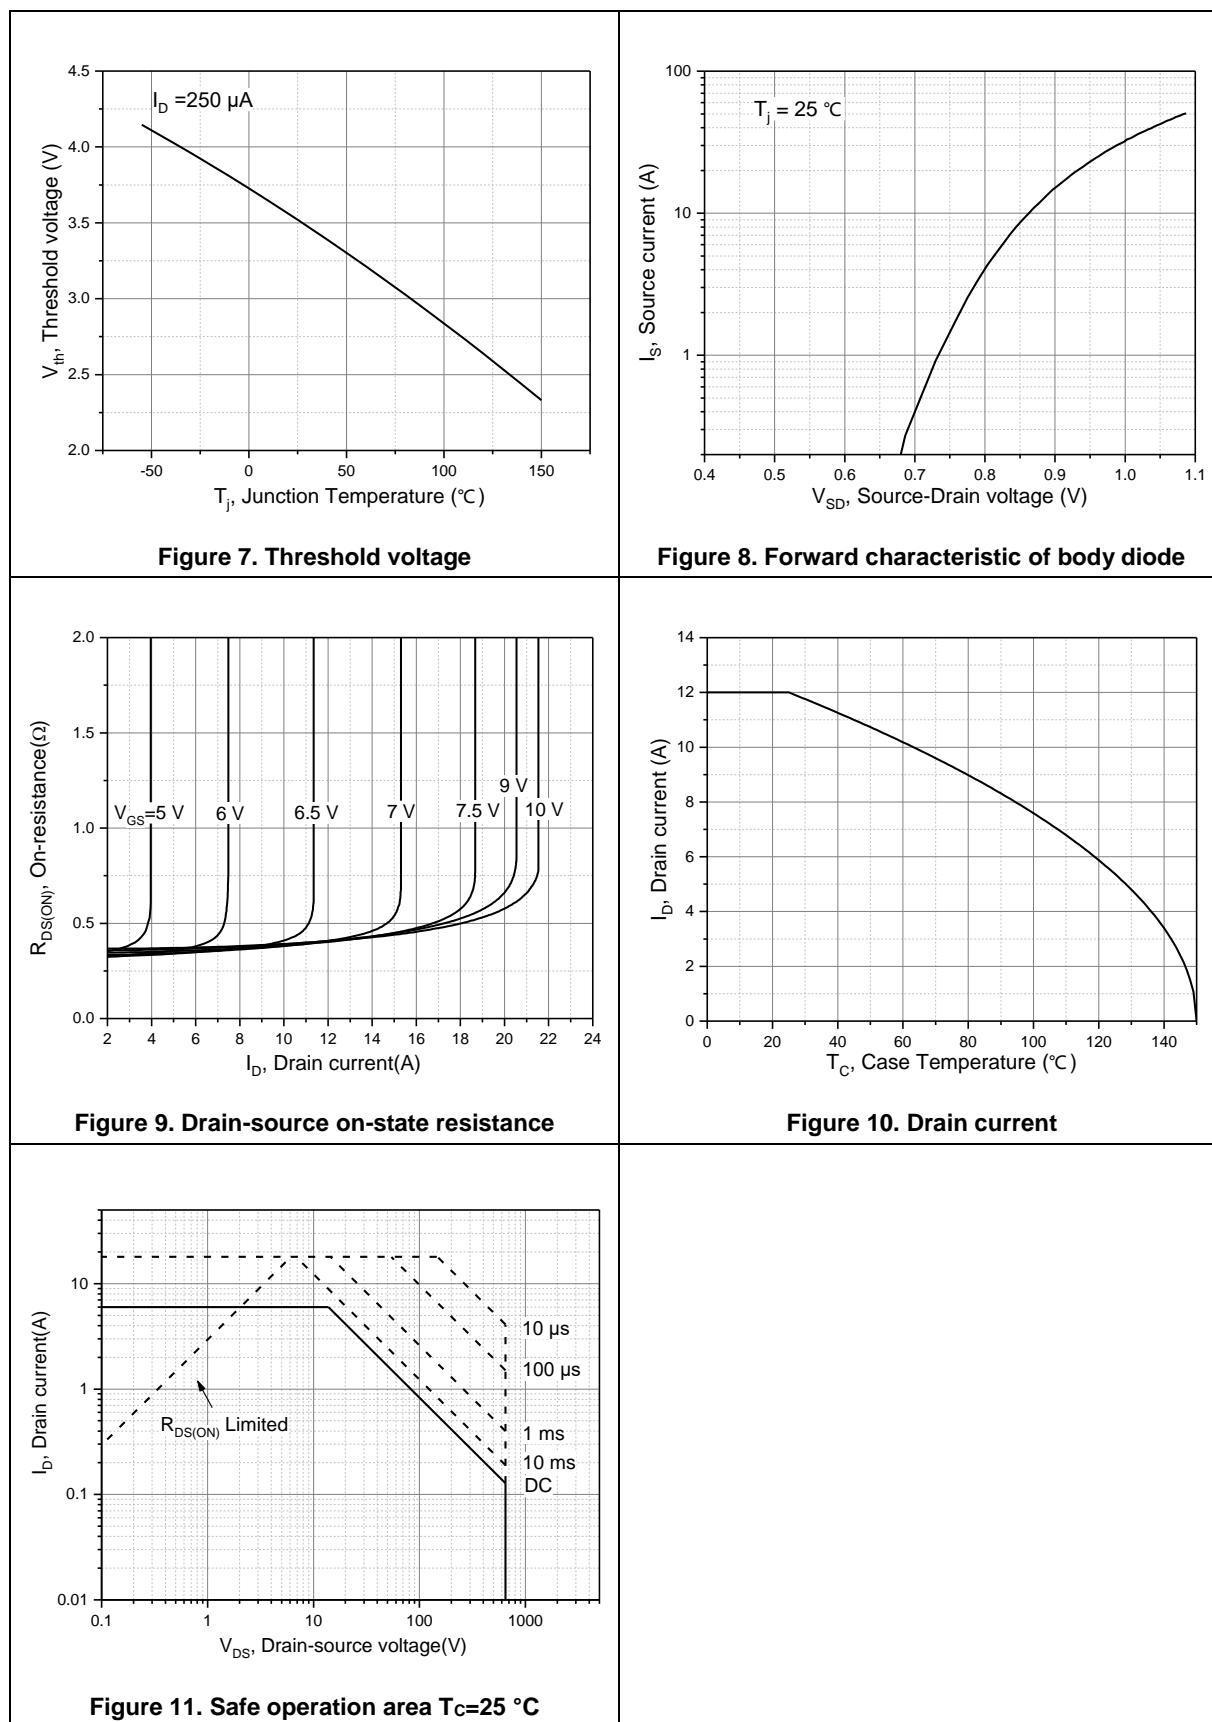


**Figure 1. Gate charge test circuit & waveform**

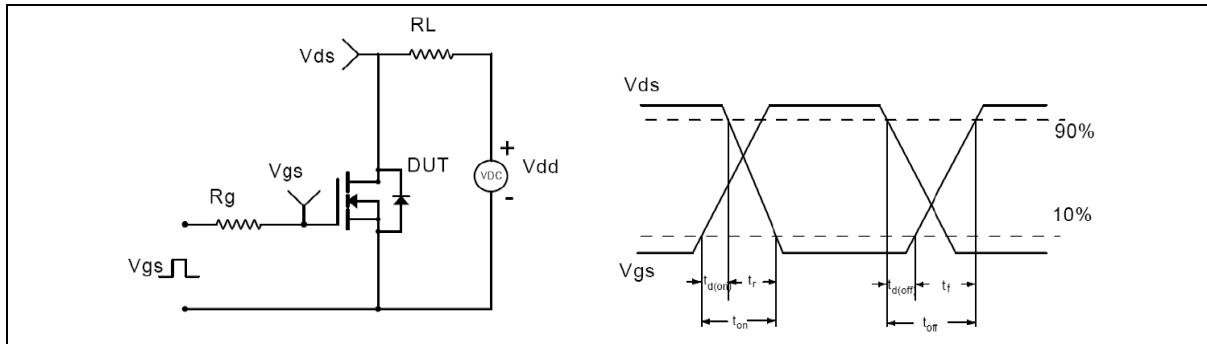

**Figure 2. Switching time test circuit & waveforms**

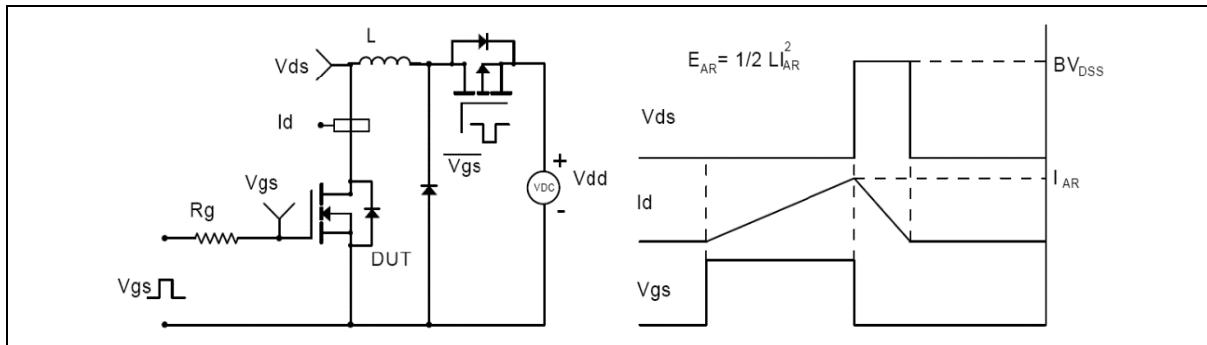


**Figure 3. Unclamped inductive switching (UIS) test circuit & waveforms**

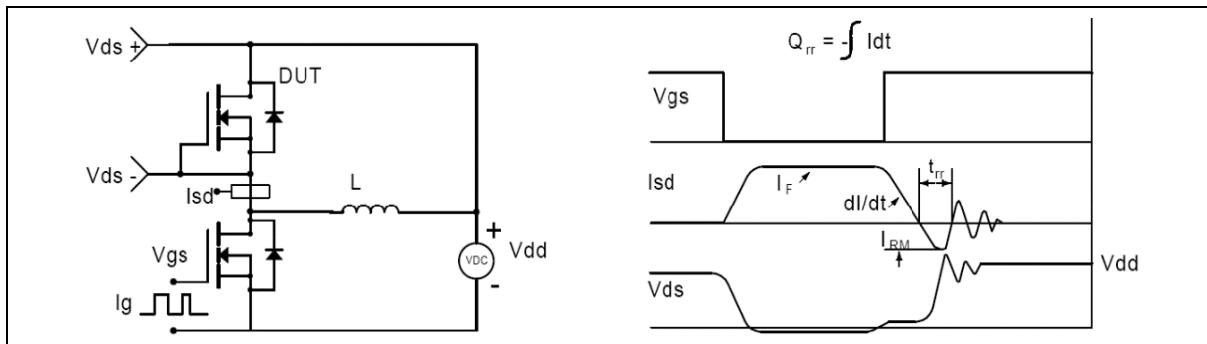

**Figure 4. Diode reverse recovery test circuit & waveforms**

### Package Information

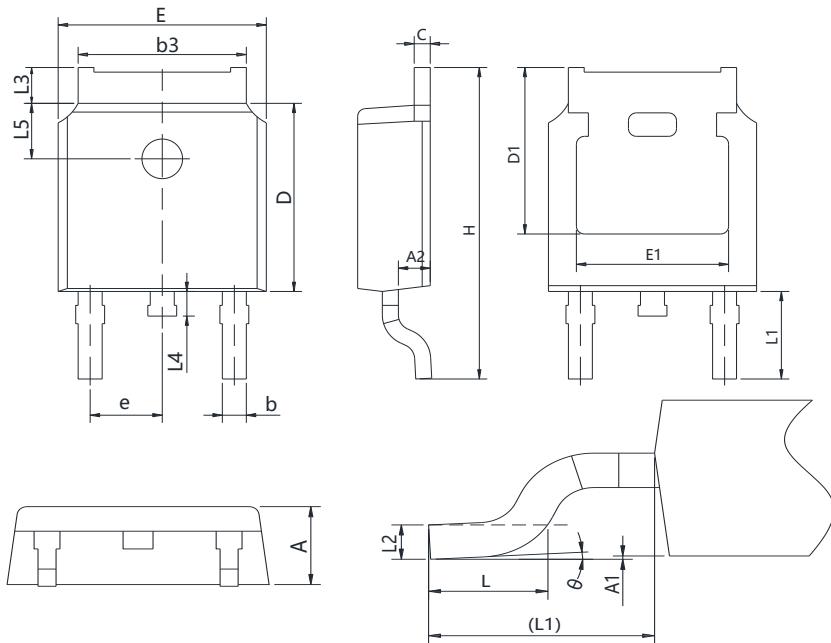

Symbol	mm		
	Min	Nom	Max
A	2.20	2.30	2.38
A1	0.00	-	0.20
A2	0.97	1.07	1.17
b	0.68	0.78	0.90
b3	5.20	5.33	5.46
c	0.43	0.53	0.61
D	5.98	6.10	6.22
D1	5.30REF		
E	6.40	6.60	6.73
E1	4.63	-	-
e	2.286BSC		
H	9.40	10.10	10.50
L	1.38	1.50	1.75
L1	2.90REF		
L2	0.51BSC		
L3	0.88	-	1.28
L4	0.50	-	1.00
θ	0°	-	8°

Version 1: TO252-C package outline dimension

## Ordering Information

Package Type	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Carton Box	Units/Carton Box
TO252-C	2500	2	5000	5	25000

## Product Information

Product	Package	Pb Free	RoHS	Halogen Free
OSS65R340DF	TO252	yes	yes	yes

## Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved /