


Features

- 1350V Reverse Conducting Field Stop Trench Technology
- High Speed Switching
- Low Conduction Loss
- Positive Temperature Coefficient
- Easy Parallel Operation
- 175°C Operating Temperature
- RoHS Compliant
- JEDEC Qualification

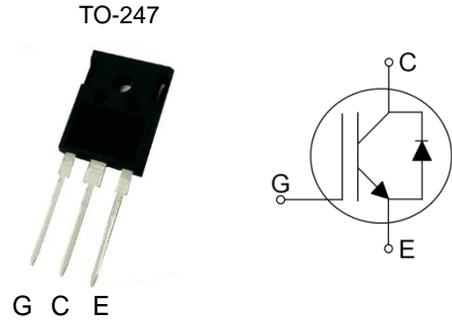

Applications

- Induction Heating
- Inverterized microwave ovens
- Soft Switching Applications

| Device | Package | Marking | Remark |
|-------------|---------|-------------|--------|
| TGH30S135FD | TO-247 | TGH30S135FD | RoHS |

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|-----------|-----------------------------------|------------------|
| Collector-Emitter Voltage | V_{CES} | 1350 | V |
| Gate-Emitter Voltage | V_{GES} | ± 25 | V |
| Continuous Collector Current | I_C | $T_C = 25\text{ }^\circ\text{C}$ | 60 |
| | | $T_C = 100\text{ }^\circ\text{C}$ | 30 |
| Pulsed Collector Current (Note 1) | I_{CM} | 180 | A |
| Diode Continuous Forward Current | I_F | 30 | A |
| Power Dissipation | P_D | $T_C = 25\text{ }^\circ\text{C}$ | 366 |
| | | $T_C = 100\text{ }^\circ\text{C}$ | 183 |
| Operating Junction Temperature | T_{vj} | -55 ~ 175 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 ~ 175 | $^\circ\text{C}$ |
| Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | T_L | 300 | $^\circ\text{C}$ |

Notes :

- (1) Repetitive rating : Pulse width limited by maximum junction temperature , During production, high current switching capability is 100% verified with the inductive load single-pulse switching test. ($I_C = 180\text{A}$)

Thermal Characteristics

| Parameter | Symbol | Value | Unit |
|---|-------------------------|-------|--------------------|
| Maximum Thermal resistance, Junction-to-Case | $R_{\theta JC}$ (IGBT) | 0.41 | $^\circ\text{C/W}$ |
| Maximum Thermal resistance, Junction-to-Case | $R_{\theta JC}$ (DIODE) | 0.41 | $^\circ\text{C/W}$ |
| Maximum Thermal resistance, Junction-to-Ambient | $R_{\theta JA}$ | 40 | $^\circ\text{C/W}$ |

Electrical Characteristics $T_{vj}=25^{\circ}\text{C}$, unless otherwise noted

| Parameter | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|---------------|---|------|------|-----------|----------|
| OFF | | | | | | |
| Collector – Emitter Breakdown Voltage | BV_{CES} | $V_{GE} = 0V, I_C = 1mA$ | 1350 | -- | -- | V |
| Zero Gate Voltage Collector Current | I_{CES} | $V_{CE} = 1350V, V_{GE} = 0V$ | -- | -- | 1 | mA |
| Gate – Emitter Leakage Current | I_{GES} | $V_{CE} = 0V, V_{GE} = \pm 25V$ | -- | -- | ± 500 | nA |
| Integrated Gate Resistor | $R_{G(int)}$ | $f = 1MHz, \text{open Collector}$ | -- | 5.3 | -- | Ω |
| ON | | | | | | |
| Gate – Emitter Threshold Voltage | $V_{GE(TH)}$ | $V_{GE} = V_{CE}, I_C = 30mA$ | 5.0 | 6.5 | 8.0 | V |
| Collector – Emitter Saturation Voltage | $V_{CE(SAT)}$ | $V_{GE} = 15V, I_C = 30A, T_{vj} = 25^{\circ}\text{C}$ | -- | 1.80 | 2.20 | V |
| | | $V_{GE} = 15V, I_C = 30A, T_{vj} = 125^{\circ}\text{C}$ | -- | 2.12 | -- | |
| | | $V_{GE} = 15V, I_C = 30A, T_{vj} = 175^{\circ}\text{C}$ | -- | 2.35 | -- | |
| Diode Forward Voltage | V_{FM} | $I_F = 30A, T_{vj} = 25^{\circ}\text{C}$ | -- | 2.37 | -- | V |
| | | $I_F = 30A, T_{vj} = 125^{\circ}\text{C}$ | -- | 2.61 | -- | |
| | | $I_F = 30A, T_{vj} = 175^{\circ}\text{C}$ | -- | 2.78 | -- | |
| DYNAMIC | | | | | | |
| Input Capacitance | C_{IES} | $V_{CE} = 30V,$ $V_{GE} = 0V$ $f = 1MHz$ | -- | 3675 | -- | pF |
| Output Capacitance | C_{OES} | | -- | 57 | -- | |
| Reverse Transfer Capacitance | C_{RES} | | -- | 44 | -- | |
| Total Gate Charge | Q_g | $V_{CC} = 600V, I_C = 30A$ $V_{GE} = 15V$ | -- | 166 | 249 | nC |
| Gate-Emitter Charge | Q_{ge} | | -- | 23 | 34 | |
| Gate-Collector Charge | Q_{gc} | | -- | 71 | 106 | |

Electrical Characteristics $T_{vj}=25^{\circ}\text{C}$, unless otherwise noted

| Parameter | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|---------------------------|--------------|--|------|------|------|------|
| SWITCHING (Note 2) | | | | | | |
| Turn-Off Delay Time | $t_{d(off)}$ | $V_{CC} = 600\text{V}, I_C = 15\text{A}$ $R_G = 5\Omega, V_{GE} = 15\text{V}$ Inductive Load, $T_{vj} = 25^{\circ}\text{C}$ | -- | 113 | -- | ns |
| Fall Time | t_f | | -- | 106 | 159 | ns |
| Turn-Off Switching Loss | E_{OFF} | | -- | 0.38 | 0.57 | mJ |
| Turn-Off Delay Time | $t_{d(off)}$ | $V_{CC} = 600\text{V}, I_C = 15\text{A}$ $R_G = 5\Omega, V_{GE} = 15\text{V}$ Inductive Load, $T_{vj} = 175^{\circ}\text{C}$ | -- | 131 | -- | ns |
| Fall Time | t_f | | -- | 213 | -- | ns |
| Turn-Off Switching Loss | E_{OFF} | | -- | 0.70 | 1.05 | mJ |
| Turn-Off Delay Time | $t_{d(off)}$ | $V_{CC} = 600\text{V}, I_C = 30\text{A}$ $R_G = 5\Omega, V_{GE} = 15\text{V}$ Inductive Load, $T_{vj} = 25^{\circ}\text{C}$ | -- | 113 | -- | ns |
| Fall Time | t_f | | -- | 105 | 157 | ns |
| Turn-Off Switching Loss | E_{OFF} | | -- | 0.81 | 1.22 | mJ |
| Turn-Off Delay Time | $t_{d(off)}$ | $V_{CC} = 600\text{V}, I_C = 30\text{A}$ $R_G = 5\Omega, V_{GE} = 15\text{V}$ Inductive Load, $T_{vj} = 175^{\circ}\text{C}$ | -- | 123 | -- | ns |
| Fall Time | t_f | | -- | 220 | -- | ns |
| Turn-Off Switching Loss | E_{OFF} | | -- | 1.52 | 2.28 | mJ |

Notes :

(2) Not subject to production test – verified by design/characterization

Device Characteristics

Fig. 1 IGBT Output Characteristics

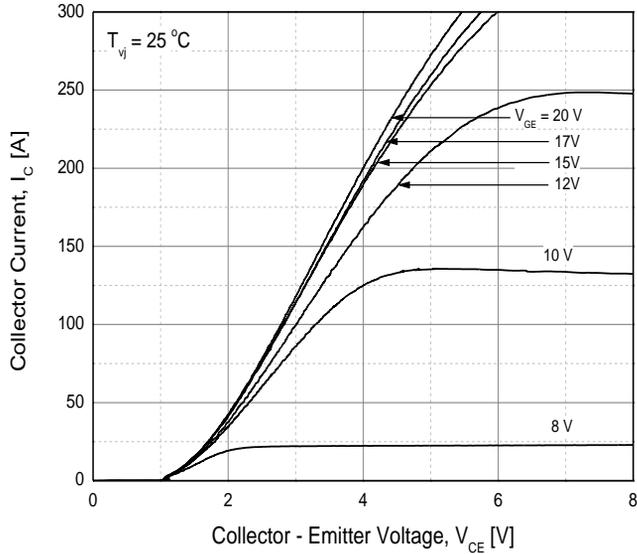


Fig. 2 IGBT Output Characteristics



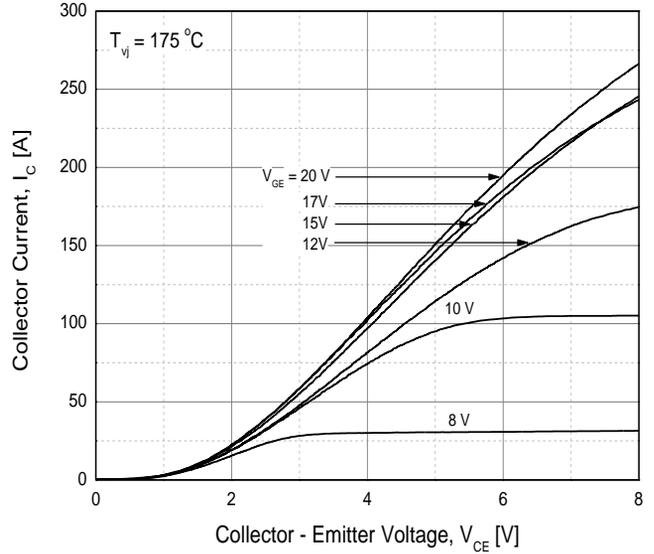


Fig. 3 IGBT Saturation Voltage vs. Junction Temperature Fig. 4 IGBT Threshold Voltage vs. Junction Temperature

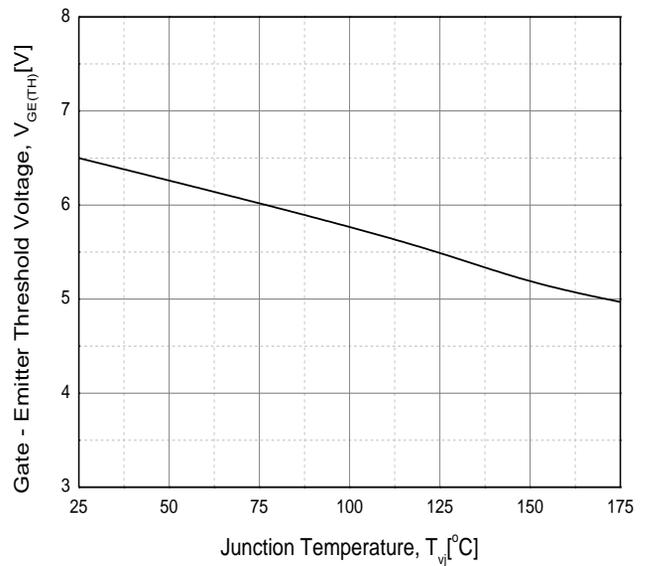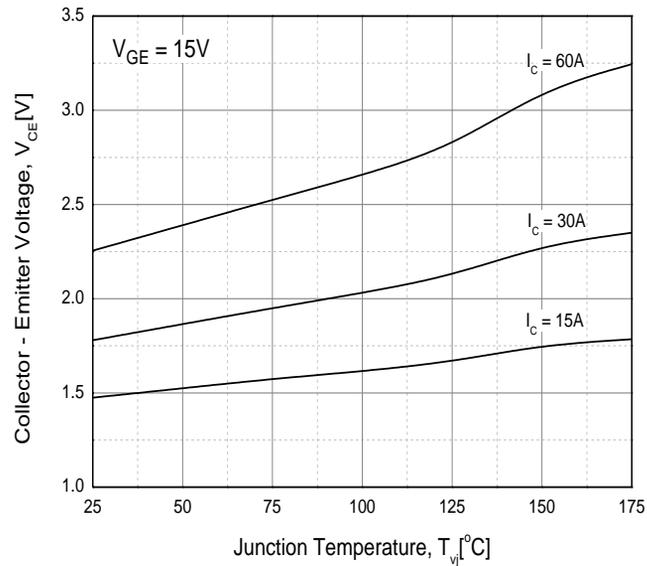

Device Characteristics

Fig. 5 IGBT Transfer Characteristic

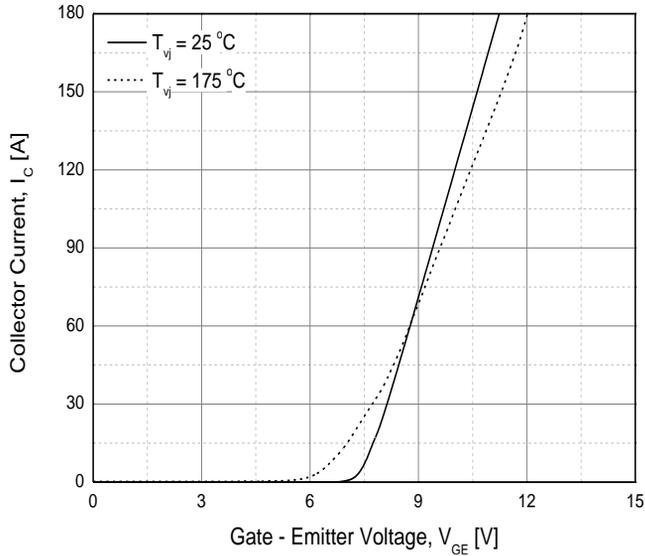


Fig. 6 IGBT Capacitance Characteristics

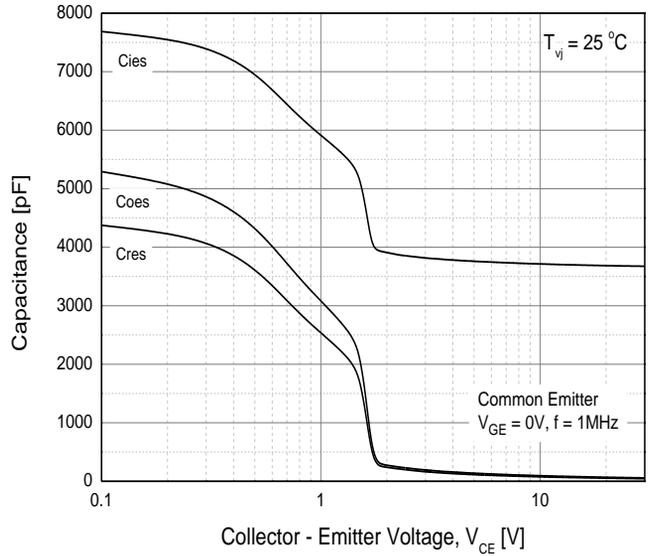


Fig. 7 Diode Conduction Characteristics


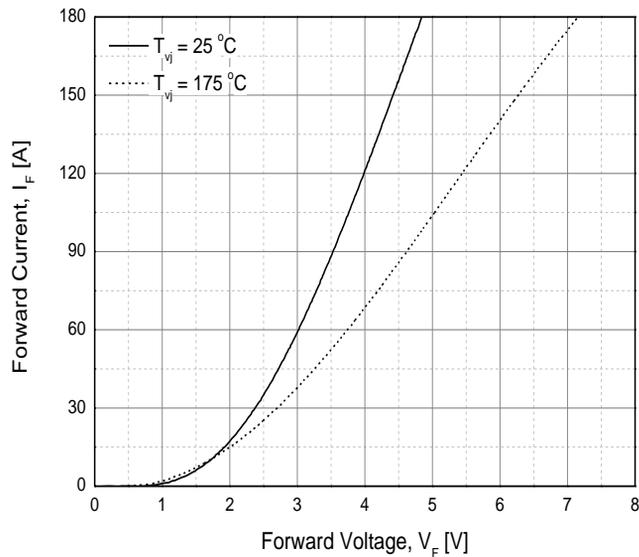


Fig. 8 Diode Forward Voltage vs. Junction Temperature

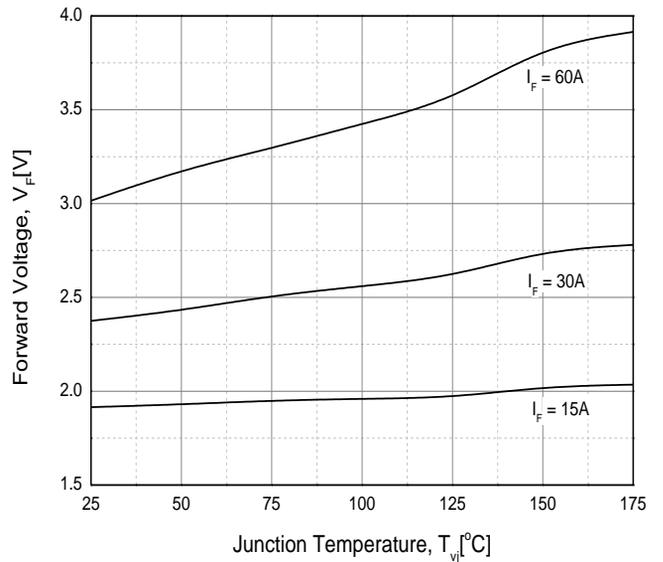

Device Characteristics

Fig. 9 Turn-off Time vs. Gate Resistor

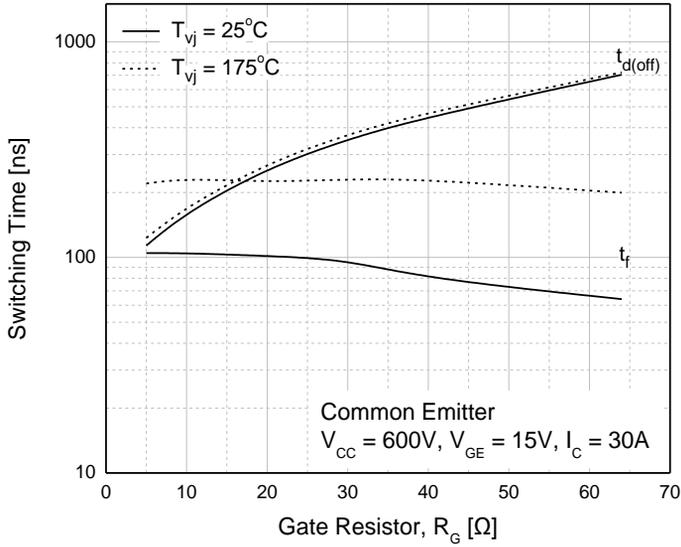


Fig. 10 Turn-off Time vs. Collector Current

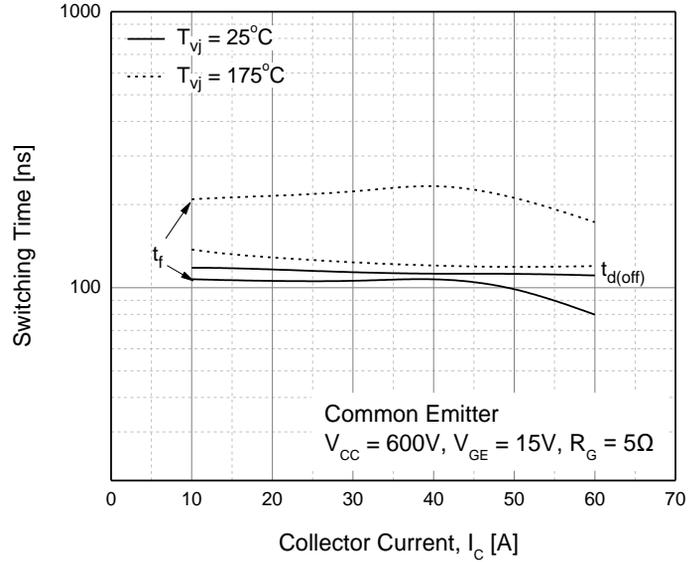


Fig. 11 Turn-off Loss vs. Gate Resistor


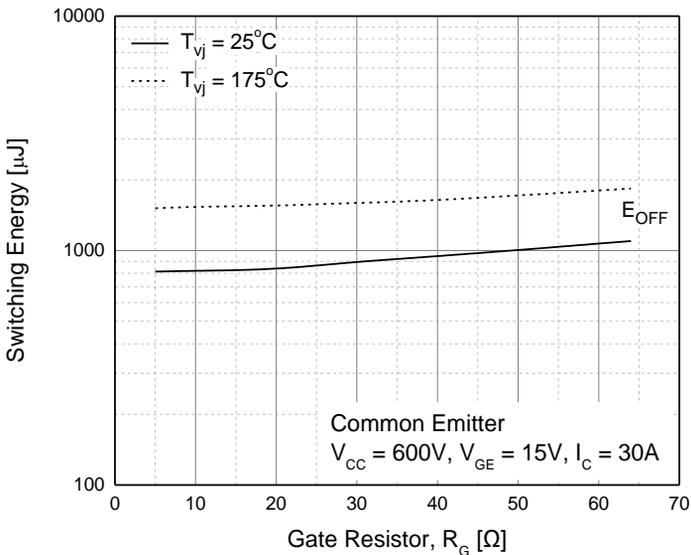


Fig. 12 Turn-off Loss vs. Collector Current

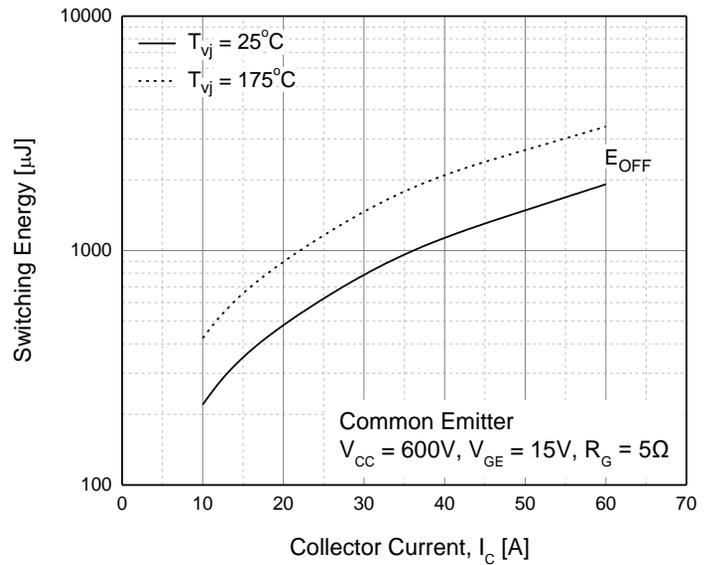

Device Characteristics

Fig. 13 Gate Charge Characteristics

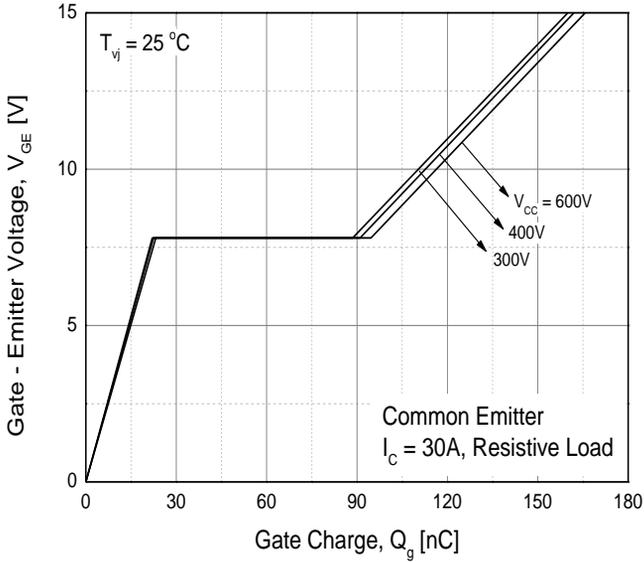


Fig. 14 Transient Thermal Impedance

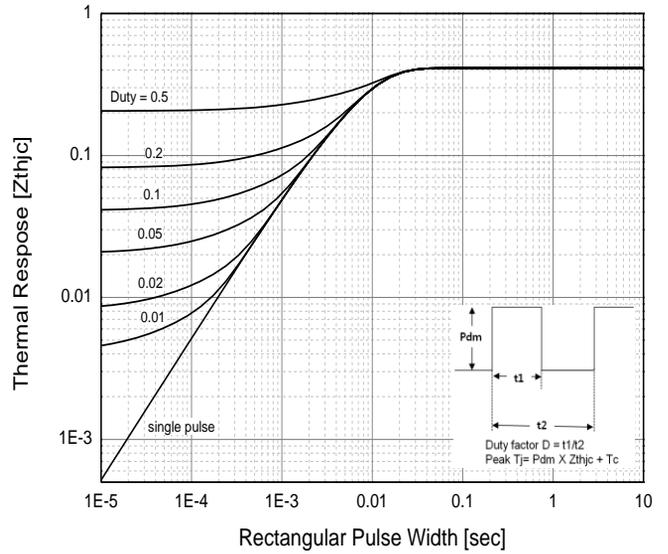


Fig. 15 Power Dissipation vs. Case Temperature


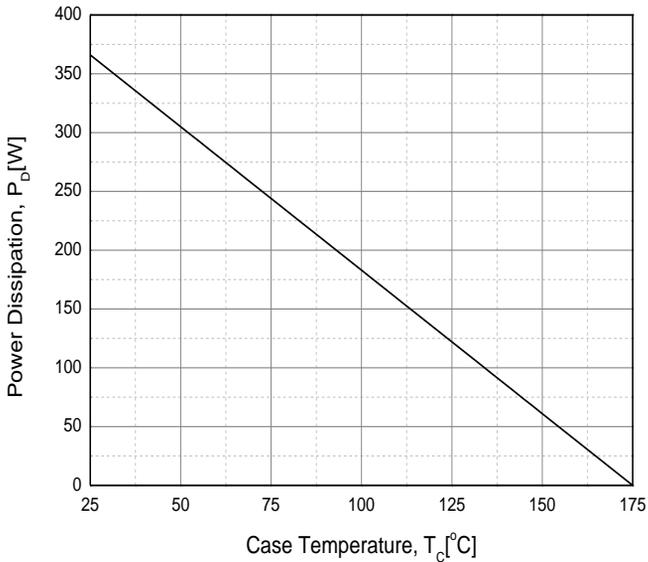


Fig. 16 Collector Current vs. Case Temperature

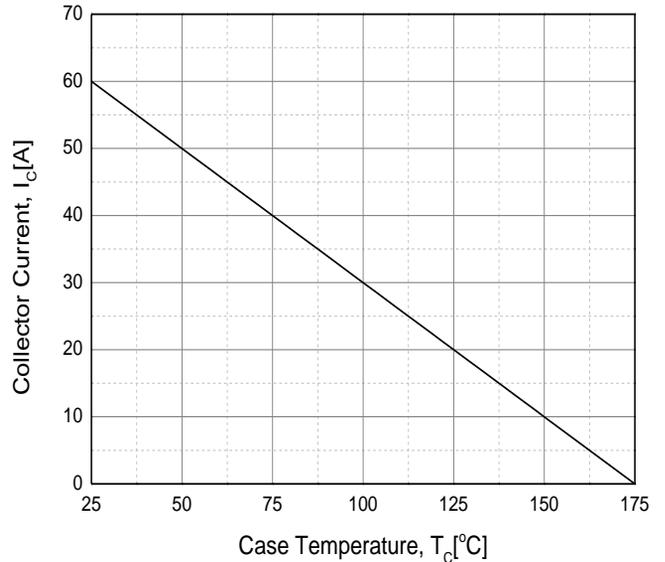

Device Characteristics

Fig. 17 SOA

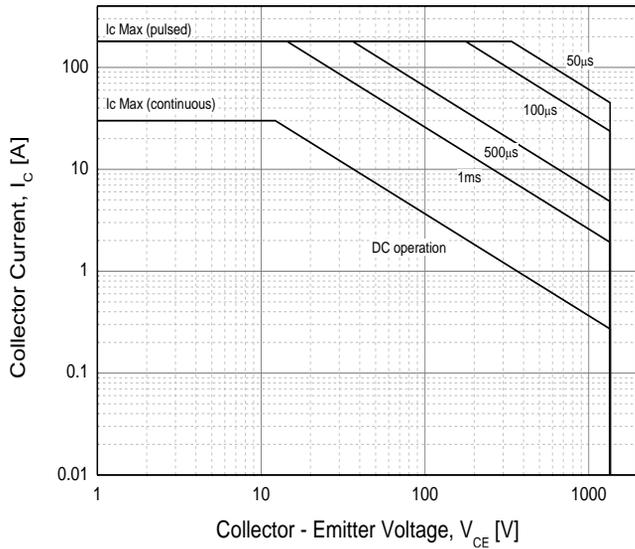


Fig. 18 RBSOA

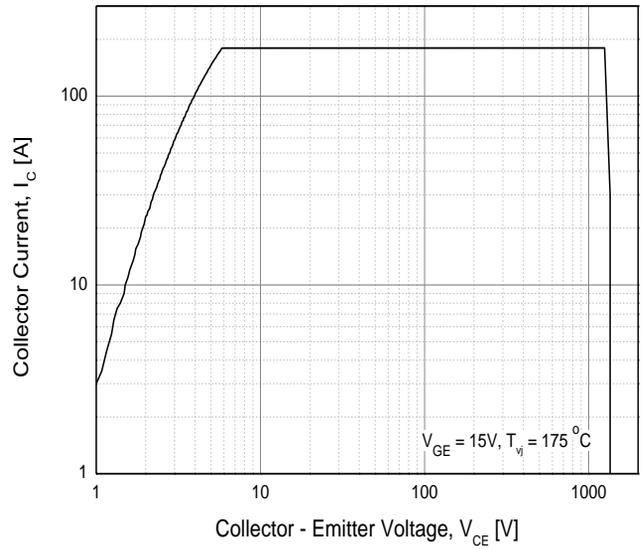


Fig. 19 Load Current vs. Frequency



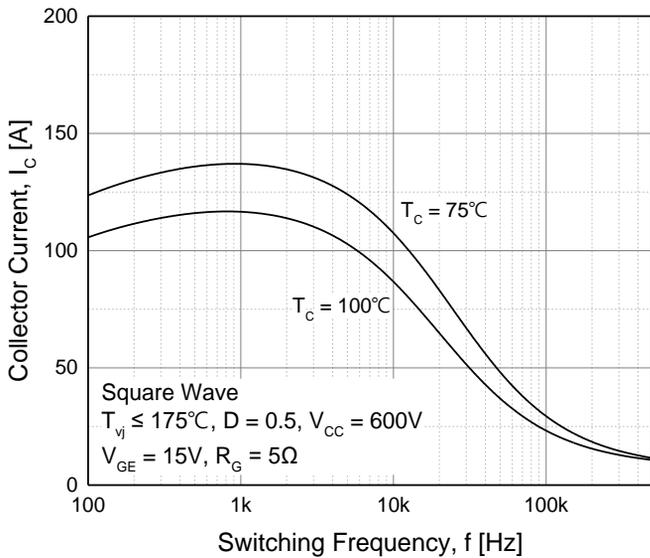


Fig. 20 Load Current vs. Frequency

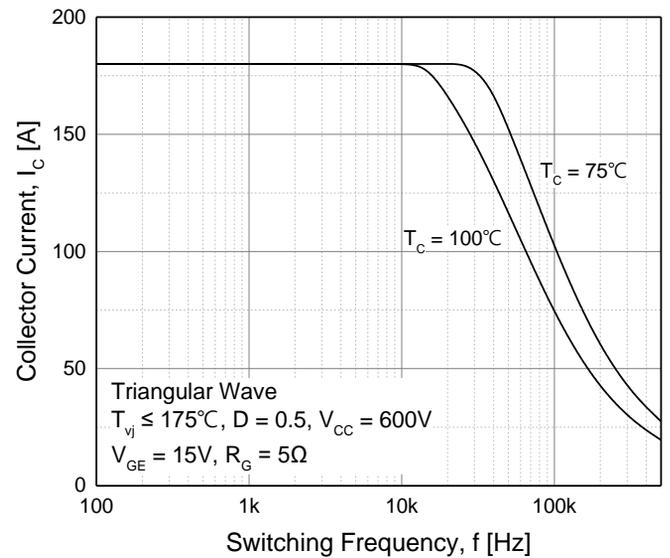

TO-247 MECHANICAL DATA

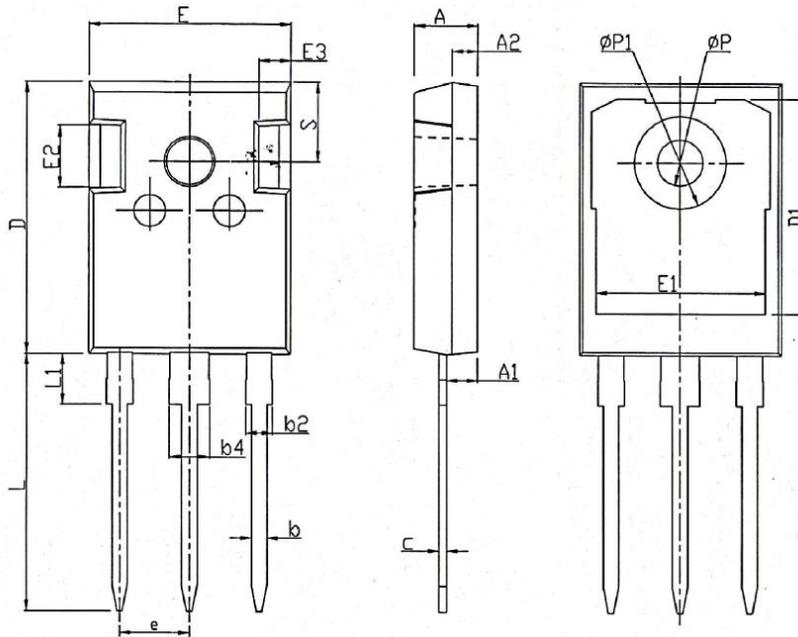

| SYMBOL | mm | | |
|--------|---------|-------|-------|
| | MIN | NOM | MAX |
| A | 4.80 | 5.00 | 5.20 |
| A1 | 2.21 | 2.41 | 2.59 |
| A2 | 1.85 | 2.00 | 2.15 |
| b | 1.11 | 1.21 | 1.36 |
| b2 | 1.91 | 2.01 | 2.21 |
| b4 | 2.91 | 3.01 | 3.21 |
| c | 0.51 | 0.61 | 0.75 |
| D | 20.80 | 21.00 | 21.30 |
| D1 | 16.25 | 16.55 | 16.85 |
| E | 15.50 | 15.80 | 16.10 |
| E1 | 13.00 | 13.30 | 13.60 |
| E2 | 4.80 | 5.00 | 5.20 |
| E3 | 2.30 | 2.50 | 2.70 |
| e | 5.44BSC | | |
| L | 19.62 | 19.92 | 20.22 |
| L1 | - | - | 4.30 |
| ΦP | 3.40 | 3.60 | 3.80 |
| ΦP1 | - | - | 7.30 |
| S | 6.15BSC | | |

Disclaimer

TRinno technology reserves the right to make changes without notice to products herein to improve reliability, performance, or design. The information given in this document is believed to be accurate and reliable. However, it shall in no event be regarded as a guarantee of conditions and characteristics. With respect to any information regarding the application of the device, TRinno technology hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of patent rights of any third party.