


### Features:

- 1200V Field Stop Trench Technology
- High Speed Switching
- Low Conduction Loss
- Positive Temperature Coefficient
- Easy parallel Operation
- RoHS compliant
- JEDEC Qualification



### Applications :

Induction Heating, Soft switching application, UPS, Welder, Inverter

| Device      | Package | Marking     | Remark |
|-------------|---------|-------------|--------|
| TGL40N120FD | TO-264  | TGL40N120FD | RoHS   |

### Absolute Maximum Ratings

| Parameter   | Symbol                            | Value                             | Unit             |
|---|-----------------------------------|-----------------------------------|------------------|
| Collector-Emitter Voltage   | $V_{CES}$                         | 1200                              | V                |
| Gate-Emitter Voltage  | $V_{GES}$                         | $\pm 20$                          | V                |
| Continuous Collector Current  | $I_c$                             | $T_C = 25\text{ }^\circ\text{C}$  | 80               |
|   |                                   | $T_C = 100\text{ }^\circ\text{C}$ | 40               |
| Pulsed Collector Current (Note 1)   | $I_{CM}$                          | 120                               | A                |
| Diode Continuous Forward Current  | $T_C = 100\text{ }^\circ\text{C}$ | $I_F$                             | 40               |
| Diode Maximum Forward Current   | $I_{FM}$                          | 120                               | A                |
| Power Dissipation   | $P_D$                             | $T_C = 25\text{ }^\circ\text{C}$  | 480              |
|   |                                   | $T_C = 100\text{ }^\circ\text{C}$ | 192              |
| Operating Junction Temperature  | $T_J$                             | -55 ~ 150                         | $^\circ\text{C}$ |
| Storage Temperature Range   | $T_{STG}$                         | -55 ~ 150                         | $^\circ\text{C}$ |
| Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | $T_L$                             | 300                               | $^\circ\text{C}$ |

Notes :

(1) Repetitive rating : Pulse width limited by maximum junction temperature

### Thermal Characteristics

| Parameter                                       | Symbol                  | Value | Unit                      |
|---|-------------------------|-------|---------------------------|
| Maximum Thermal resistance, Junction-to-Case    | $R_{\theta JC}$ (IGBT)  | 0.26  | $^\circ\text{C}/\text{W}$ |
| Maximum Thermal resistance, Junction-to-Case    | $R_{\theta JC}$ (DIODE) | 0.95  | $^\circ\text{C}/\text{W}$ |
| Maximum Thermal resistance, Junction-to-Ambient | $R_{\theta JA}$         | 25    | $^\circ\text{C}/\text{W}$ |

### Electrical Characteristics of the IGBT $T_C=25^\circ\text{C}$ , unless otherwise noted

| Parameter                              | Symbol        | Test condition   | Min. | Typ. | Max.      | Unit |
|--|---------------|--|------|------|-----------|------|
| <b>OFF</b>                             |               |  |      |      |           |      |
| Collector – Emitter Breakdown Voltage  | $BV_{CES}$    | $V_{GE} = 0V, I_C = 1mA$   | 1200 | --   | --        | V    |
| Zero Gate Voltage Collector Current    | $I_{CES}$     | $V_{CE} = 1200V, V_{GE} = 0V$  | --   | --   | 1         | mA   |
| Gate – Emitter Leakage Current         | $I_{GES}$     | $V_{CE} = 0V, V_{GE} = \pm 20V$  | --   | --   | $\pm 250$ | nA   |
| <b>ON</b>                              |               |  |      |      |           |      |
| Gate – Emitter Threshold Voltage       | $V_{GE(TH)}$  | $V_{GE} = V_{CE}, I_C = 40mA$  | 4.5  | 6.5  | 8.5       | V    |
| Collector – Emitter Saturation Voltage | $V_{CE(SAT)}$ | $V_{GE} = 15V, I_C = 40A, T_C = 25^\circ\text{C}$  | --   | 2.0  | 2.6       | V    |
|  |               | $V_{GE} = 15V, I_C = 40A, T_C = 125^\circ\text{C}$   | --   | 2.45 | --        | V    |
| <b>DYNAMIC</b>                         |               |  |      |      |           |      |
| Input Capacitance                      | $C_{IES}$     | $V_{CE} = 30V,$<br>$V_{GE} = 0V$<br>$f = 1MHz$   | --   | 5150 | --        | pF   |
| Output Capacitance                     | $C_{OES}$     |  | --   | 150  | --        | pF   |
| Reverse Transfer Capacitance           | $C_{RES}$     |  | --   | 100  | --        | pF   |
| <b>SWITCHING</b> (Note 2)              |               |  |      |      |           |      |
| Turn-On Delay Time                     | $t_{d(on)}$   | $V_{CC} = 600V, I_C = 40A$<br>$R_G = 5\Omega, V_{GE} = 15V$<br>Inductive Load, $T_C = 25^\circ\text{C}$  | --   | 55   | --        | ns   |
| Rise Time                              | $t_r$         |  | --   | 80   | --        | ns   |
| Turn-Off Delay Time                    | $t_{d(off)}$  |  | --   | 200  | --        | ns   |
| Fall Time                              | $t_f$         |  | --   | 55   | 110       | ns   |
| Turn-On Switching Loss                 | $E_{ON}$      |  | --   | 5.3  | 8.0       | mJ   |
| Turn-Off Switching Loss                | $E_{OFF}$     |  | --   | 1.1  | 1.6       | mJ   |
| Total Switching Loss                   | $E_{TS}$      |  | --   | 6.4  | 9.6       | mJ   |
| Turn-On Delay Time                     | $t_{d(on)}$   | $V_{CC} = 600V, I_C = 40A$<br>$R_G = 5\Omega, V_{GE} = 15V$<br>Inductive Load, $T_C = 125^\circ\text{C}$ | --   | 45   | --        | ns   |
| Rise Time                              | $t_r$         |  | --   | 75   | --        | ns   |
| Turn-Off Delay Time                    | $t_{d(off)}$  |  | --   | 210  | --        | ns   |
| Fall Time                              | $t_f$         |  | --   | 115  | --        | ns   |
| Turn-On Switching Loss                 | $E_{ON}$      |  | --   | 5.6  | 8.4       | mJ   |
| Turn-Off Switching Loss                | $E_{OFF}$     |  | --   | 2.2  | 3.3       | mJ   |
| Total Switching Loss                   | $E_{TS}$      |  | --   | 7.8  | 11.7      | mJ   |
| Total Gate Charge                      | $Q_g$         | $V_{CC} = 600V, I_C = 40A$<br>$V_{GE} = 15V$   | --   | 320  | 480       | nC   |
| Gate-Emitter Charge                    | $Q_{ge}$      |  | --   | 40   | 60        | nC   |
| Gate-Collector Charge                  | $Q_{gc}$      |  | --   | 150  | 225       | nC   |

Notes :

(2) Not subject to production test – verified by design/characterization

**Electrical Characteristics of the DIODE**  $T_C=25^\circ\text{C}$ , unless otherwise noted

| Parameter                | Symbol   | Test condition   |                           | Min. | Typ. | Max. | Unit |
|--------------------------|----------|--|---------------------------|------|------|------|------|
| Diode Forward Voltage    | $V_{FM}$ | $I_F = 40\text{A}$                                       | $T_C = 25^\circ\text{C}$  | --   | 2.85 | --   | V    |
|                          |          |  | $T_C = 125^\circ\text{C}$ | --   | 2.9  | --   |      |
| Reverse Recovery Time    | $t_{rr}$ | $I_F = 40\text{A},$<br>$di/dt = 200\text{A}/\mu\text{s}$ | $T_C = 25^\circ\text{C}$  | --   | 200  | --   | ns   |
|                          |          |  | $T_C = 125^\circ\text{C}$ | --   | 325  | --   |      |
| Reverse Recovery Current | $I_{rr}$ |  | $T_C = 25^\circ\text{C}$  | --   | 23   | --   | A    |
|                          |          |  | $T_C = 125^\circ\text{C}$ | --   | 43   | --   |      |
| Reverse Recovery Charge  | $Q_{rr}$ |  | $T_C = 25^\circ\text{C}$  | --   | 2500 | --   | nC   |
|                          |          |  | $T_C = 125^\circ\text{C}$ | --   | 7000 | --   |      |

### IGBT Characteristics

Fig. 1 Output characteristics

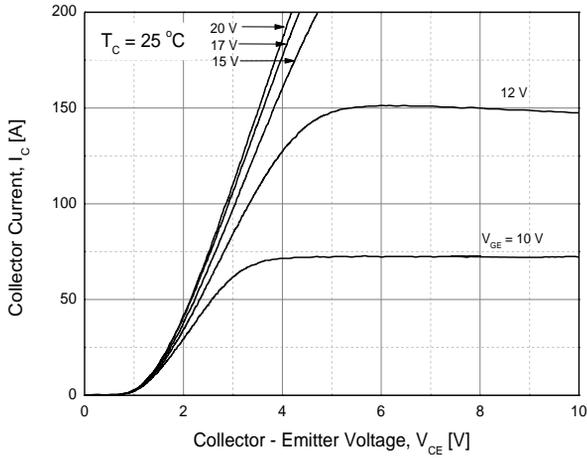


Fig. 2 Saturation voltage characteristics

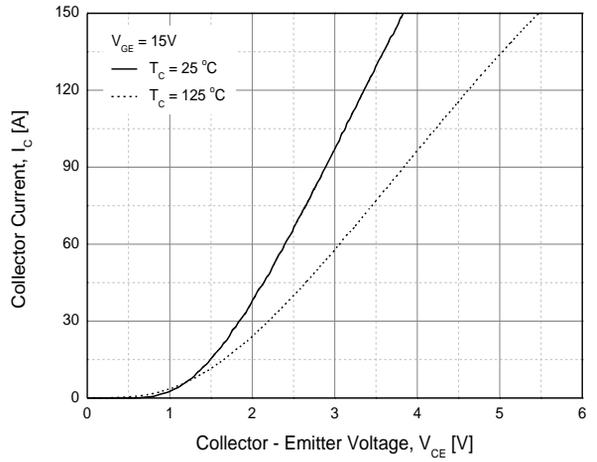


Fig. 3 Saturation voltage vs. collector current

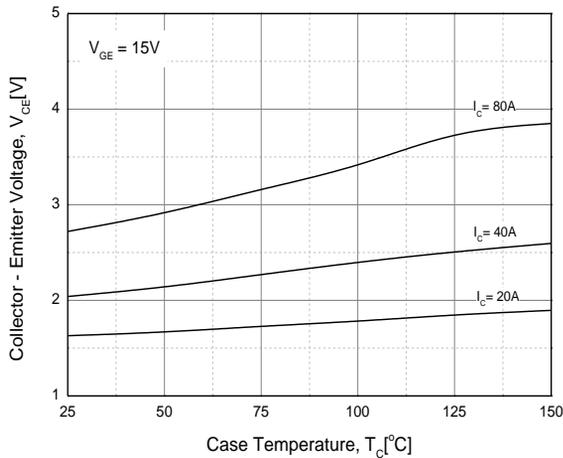


Fig. 4 Saturation voltage vs. gate bias

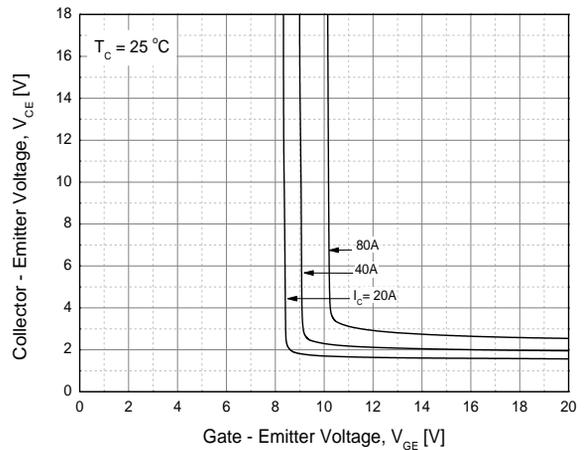


Fig. 5 Saturation voltage vs. gate bias


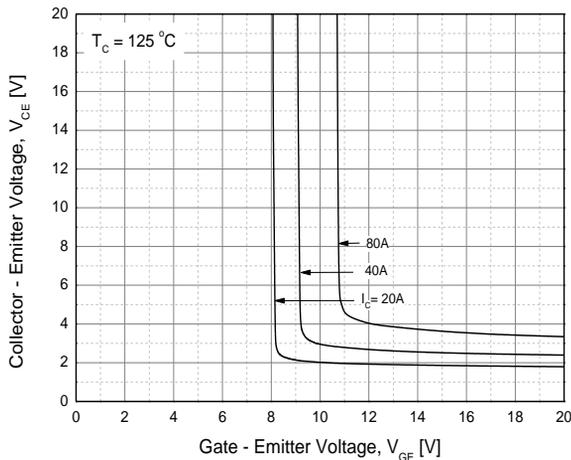


Fig. 6 Capacitance characteristics

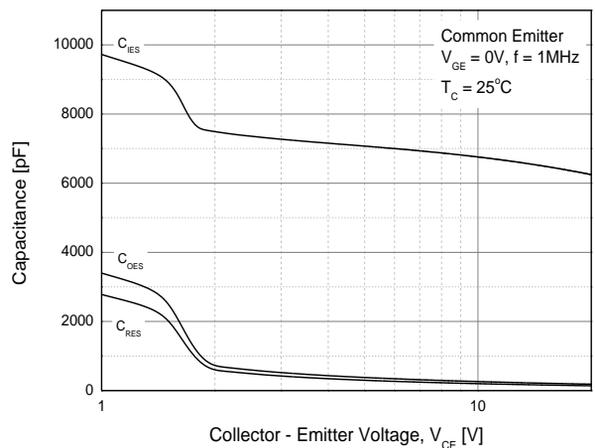

### IGBT Characteristics

Fig. 7 Turn-on time vs. gate resistor

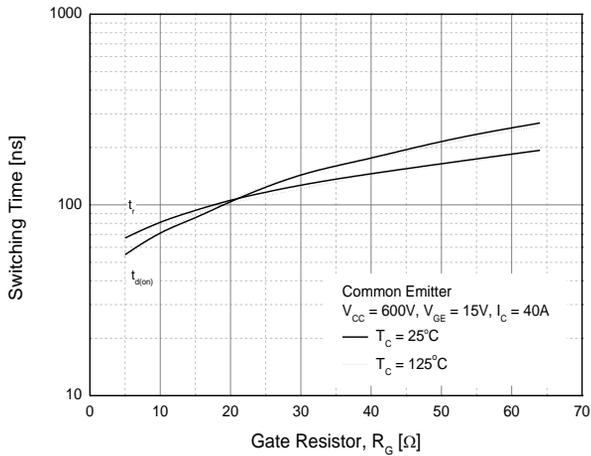


Fig. 8 Turn-off time vs. gate resistor

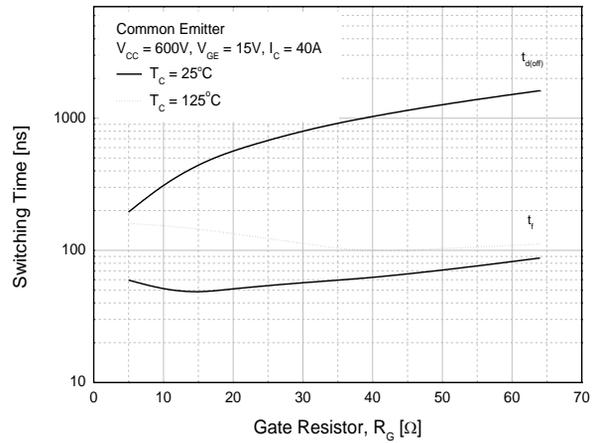


Fig. 9 Switching loss vs. gate resistor

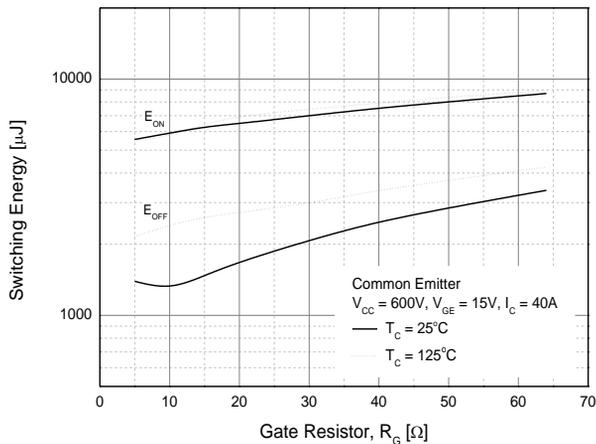


Fig. 10 Turn-on time vs. collector current

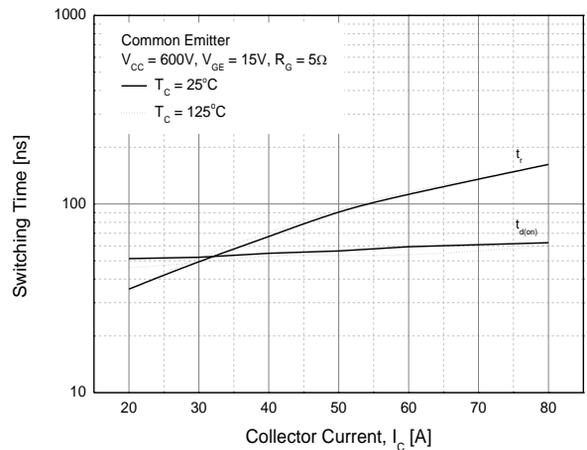


Fig. 11 Turn-off time vs. collector current


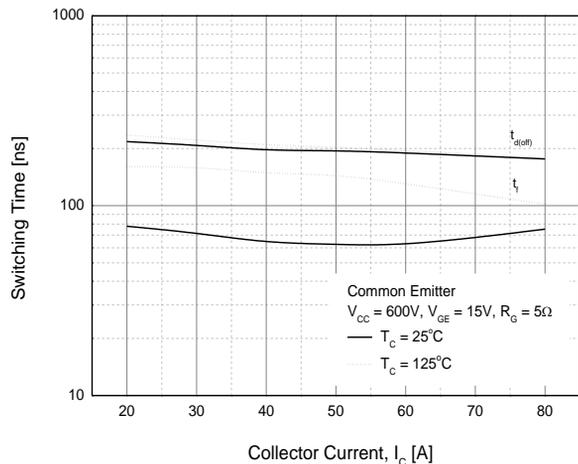


Fig. 12 Switching loss vs. collector current

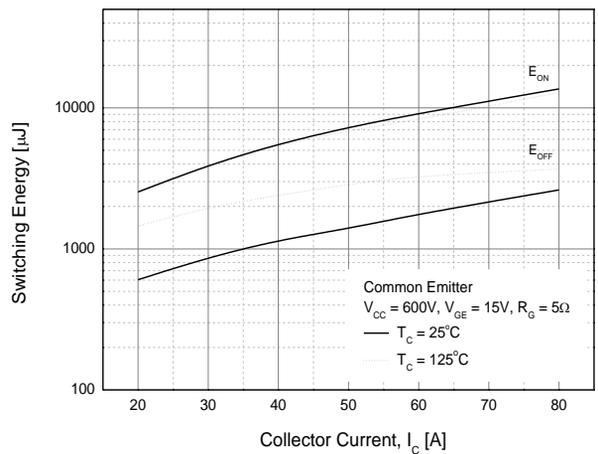

### IGBT Characteristics

Fig. 13 Gate charge characteristics

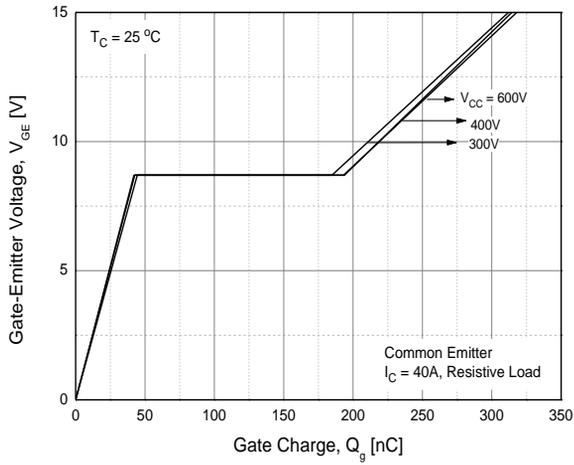


Fig. 14 SOA

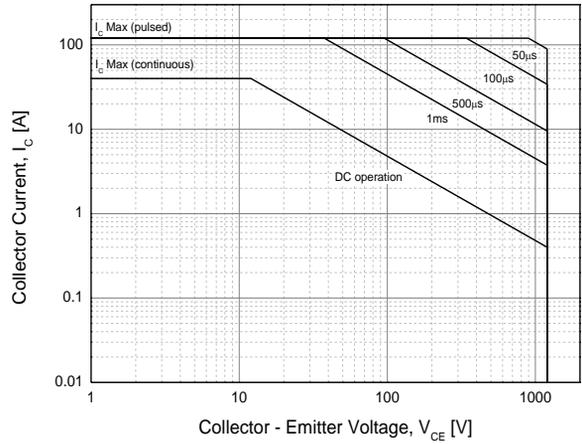


Fig. 15 RBSOA

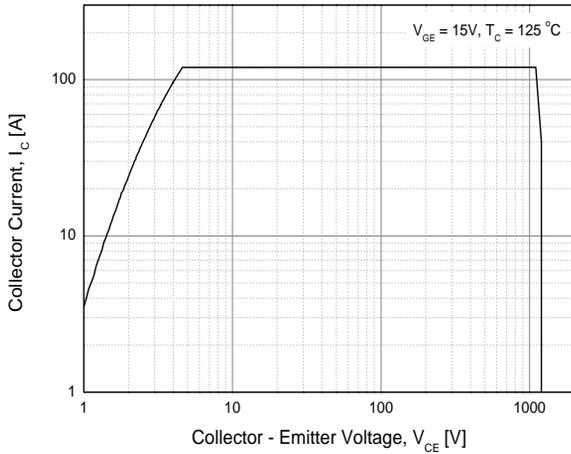


Fig. 16 Transient thermal impedance of IGBT


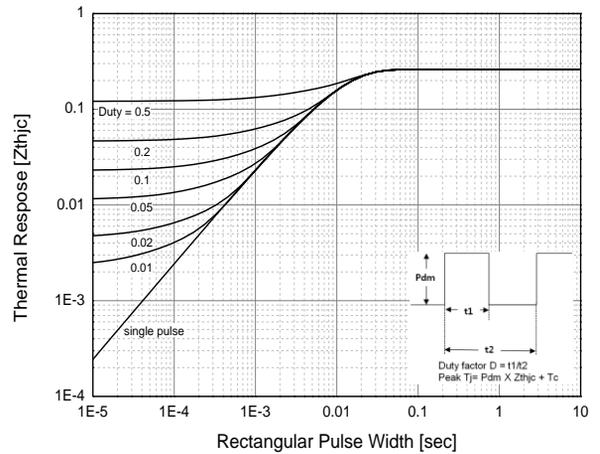


Fig. 17 Load Current vs. Frequency

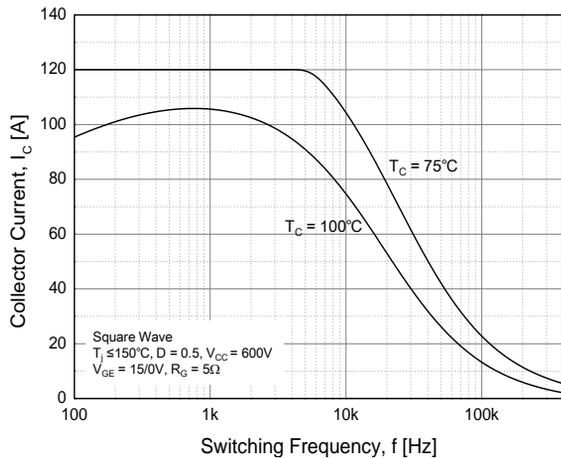

## Diode Characteristics

Fig. 18 Conduction characteristics

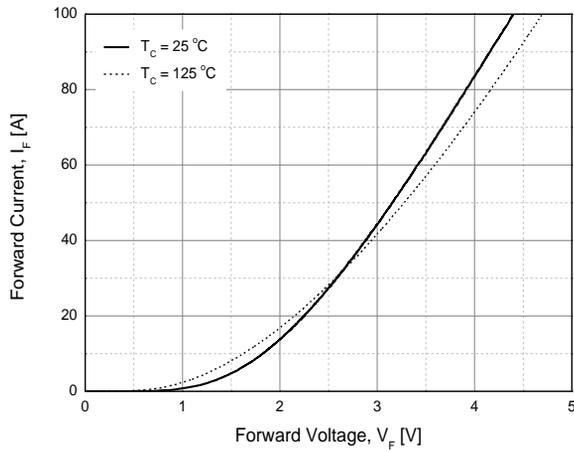


Fig. 19 Reverse recovery current vs. forward current

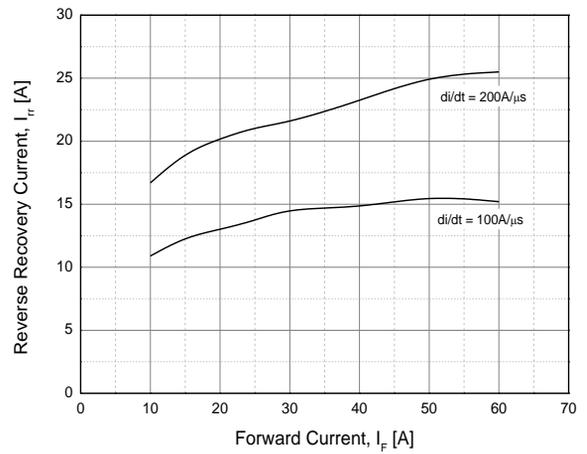


Fig. 20 Reverse recovery charge vs. forward current



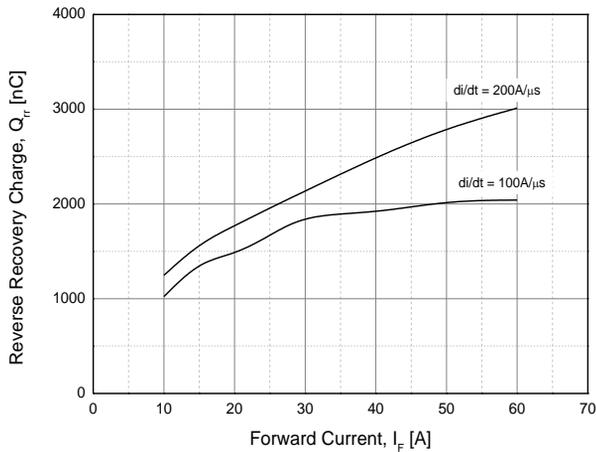


Fig. 21 Reverse recovery time vs. forward current

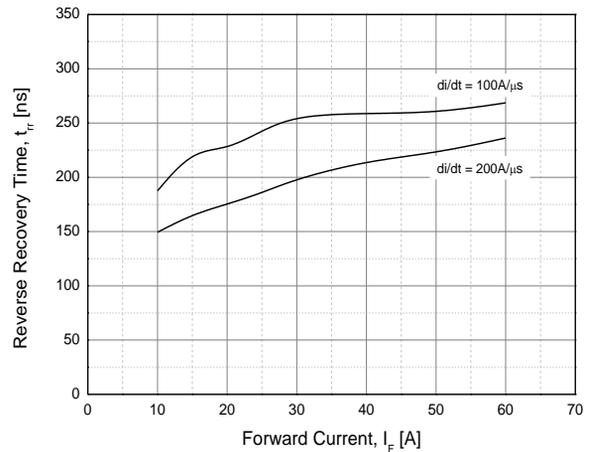

### TO-264 MECHANICAL DATA

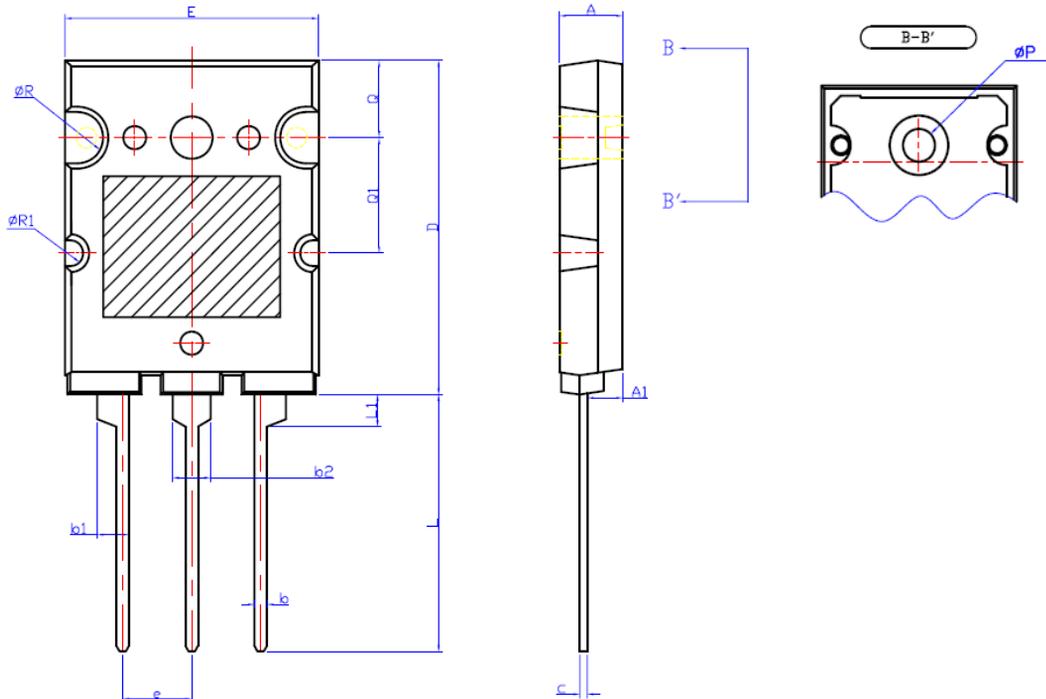

| SYMBOL    | MIN    | NDM   | MAX   |
|-----------|--------|-------|-------|
| A         | 4.80   | 5.00  | 5.20  |
| A1        | 2.50   | 2.80  | 3.10  |
| b         | 0.90   | 1.00  | 1.25  |
| b1        | 2.30   | 2.50  | 2.70  |
| b2        | 2.80   | 3.00  | 3.20  |
| c         | 0.50   | 0.60  | 0.85  |
| D         | 25.80  | 26.00 | 26.20 |
| E         | 19.80  | 20.00 | 20.20 |
| e         | 5.15   | 5.45  | 5.75  |
| L         | 19.50  | 20.00 | 20.50 |
| L1        | 2.40   | 2.50  | 2.60  |
| $\phi P$  | 3.00   | 3.20  | 3.40  |
| Q         | 5.80   | 6.00  | 6.20  |
| Q1        | 8.80   | 9.00  | 9.20  |
| $\phi R$  | (2.00) |       |       |
| $\phi R1$ | (1.00) |       |       |

#### Disclaimer

TRinno technology reserves the right to make changes without notice to products herein to improve reliability, performance, or design. The information given in this document is believed to be accurate and reliable. However, it shall in no event be regarded as a guarantee of conditions and characteristics. With respect to any information regarding the application of the device, TRinno technology hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of patent rights of any third party.